



T-type-i 110/90°

For wood door cabinets with blind panels



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on





Technical details

Cup type	Interaxis 45mm	Interaxis 48mm
	Item number 701-0A96-650	Item number 701-0A98-650
	Item number 701-0D36-650	Item number 701-0D38-650
	Item number 701-0D30-650	Item number 701-0D32-650

Drilling patterns for hinge cups → see page 2.17

Cranking
17mm



100 Pcs

Cup made of steel, arm made of zinc

Mounting plates



Cam adjustable cruciform mounting plate
→ see page 2.81



Cruciform mounting plate
→ see page 2.83




Cam adjustable linear mounting plate
→ see page 2.81



Face frame adapter plate
→ see page 2.83

Hinge cup screws If not pre-mounted



820-6328-050

10000 Pcs

Accessories



Cover caps for hinge arm
→ see page 2.177






Hinge angle restrictor
→ see page 2.175

Legend of hinge cup symbols


Screw-on ready
← screws

Machine insertion ready


EasyFix system



Damping adjustment




Door adjustment

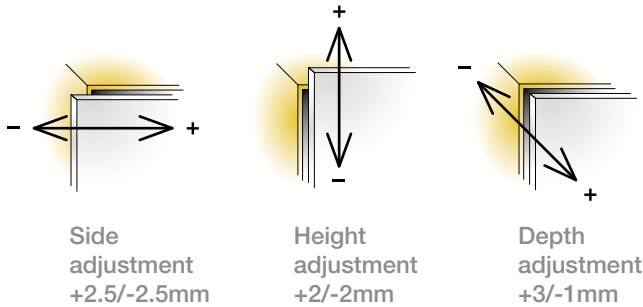

For further explanation → see page 2.25


For further explanation → see pages 2.22-2.24

Mounting details




Drawing shows application on D=2mm mounting plate

Mounting plate drilling distance



Drawing shows application on D=2mm mounting plate




Touch opening



PushOpen Solutions
→ see pages 2.199-2.204

Door clearance at R=1mm
For further explanation → see page 2.14



V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9 F _{MIN}

Gap Z_{MIN}=0