




T-type-i 110

For wood doors






- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

	Interaxis 45mm	Interaxis 48mm
Cup type	Item number	Item number
	701-OCT0-054	701-OCS0-054
	701-OCT1-054	701-OCS1-054
EasyFix 	701-OCT4-054	701-OCS4-054
Drilling patterns for hinge cups → see page 2.17		




Cranking
9mm



150 Pcs

Made of steel

Cranking
17mm



150 Pcs

Made of steel

	701-0DT0-054	701-0DS0-054
	701-0DT1-054	701-0DS1-054
EasyFix 	701-0DT4-054	701-0DS4-054
Drilling patterns for hinge cups → see page 2.17		

Mounting plates



Cam adjustable cruciform mounting plate
→ see page 2.81



Cruciform mounting plate
→ see page 2.83




Cam adjustable linear mounting plate
→ see page 2.81



Face frame adapter plate
→ see page 2.83

Hinge cup screws

If not pre-mounted



820-6328-050

10000 Pcs

Accessories



Cover caps for hinge arm
→ see page 2.177






Hinge angle restrictor
→ see page 2.175

Legend of hinge cup symbols


Screw-on ready
← screws

Machine insertion ready


EasyFix system




Damping adjustment




Door adjustment



Side
adjustment
+3/-1mm



Height
adjustment
+2/-2mm






Depth
adjustment
+4/-1mm

For further explanation → see page 2.25

For further explanation → see pages 2.22-2.24

Mounting details

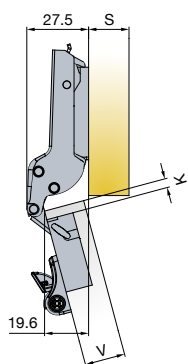

Drawings show application on
D=0mm mounting plate




Mounting plate drilling distance

Mounting plate thickness table

For further explanation → see page 2.13

X		4	5	6	7	8	9	10	
K	3	3	2	1	0				
	4	4	3	2	1	0			
	5		4	3	2	1	0		
	6			4	3	2	1	0	D

$$D = 4 + K - X$$

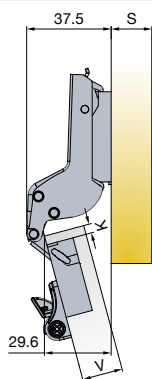

Drawings show application on
D=2mm mounting plate

V	16	17	18	19	20	21	22	23	24	
K	3	0	0	0	0	1	1	1	1	2
	4	1	1	1	1	2	2	2	2	3
	5	2	2	2	2	3	3	3	3	4
	6	3	3	3	3	4	4	4	4	

$$D = -4 + K + F$$


Touch opening



PushOpen Solutions
→ see pages 2.199-2.204

Door clearance at R=1mm

For further explanation → see page 2.14



V		16	17	18	19	20	21	22	23	24	25	26	
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5	
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5	
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5	
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9	F _{MIN}

Gap Z_{MIN}=0