PESSOTTO®


Advanced Technology for Beds


ITALIANO


ENGLISH

Mod. Boxy H20

Istruzioni di montaggio / Assembly instructions

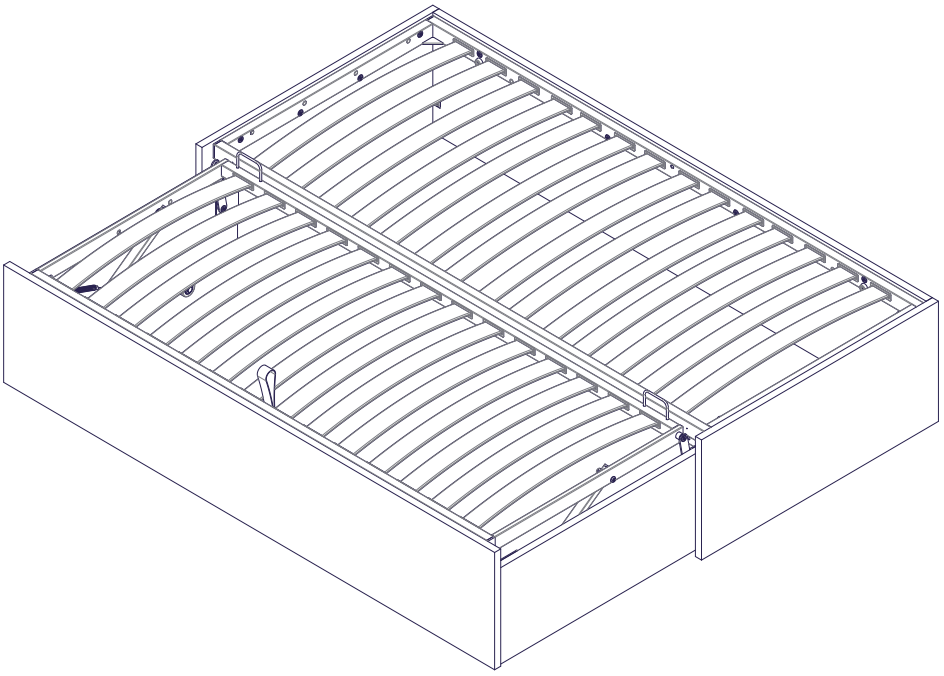

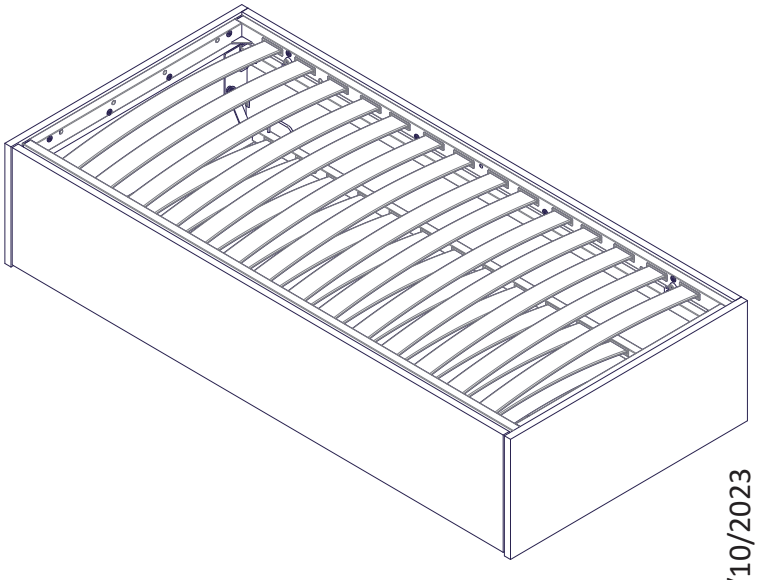


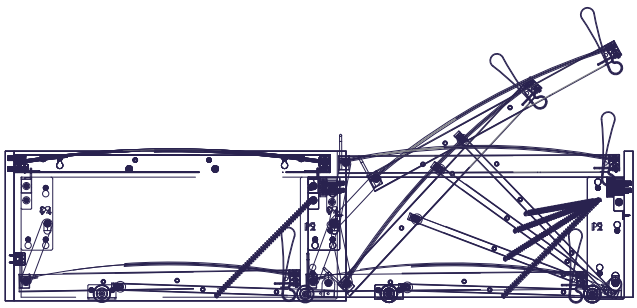


A113 27/10/2023

MADE IN ITALY


ISTRUZIONI DI MONTAGGIO / ASSEMBLY INSTRUCTIONS

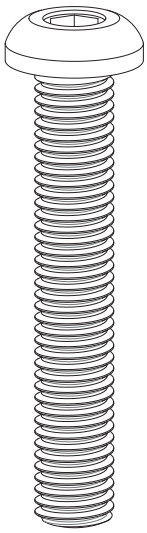


A
M10x60

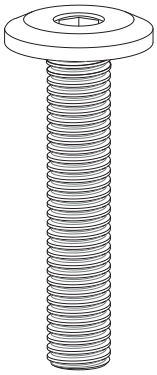


B
M8x45




C
M8x20




D
M8x15




E
M8x10




F
Ø10X30




G
M10




H x4




I x2




J x4




K x2




L x2




M x1




N x1




O x1



P x1




Q
4x18




R x1


Non fornite
Not provided




S
4x15



T x2

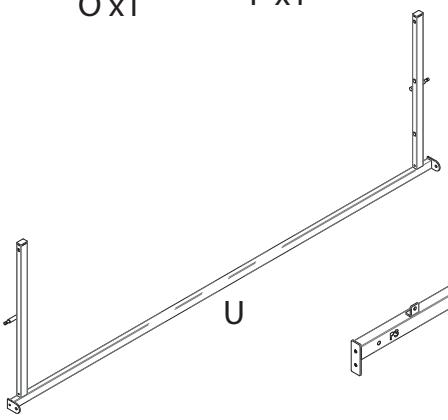



U

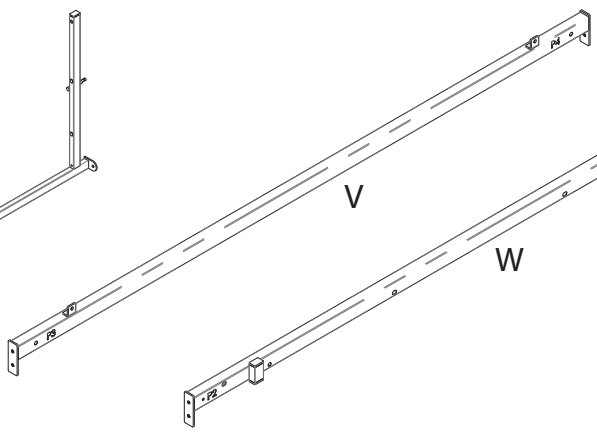


V


W








4-5mm




10mm

PESSOTTO®

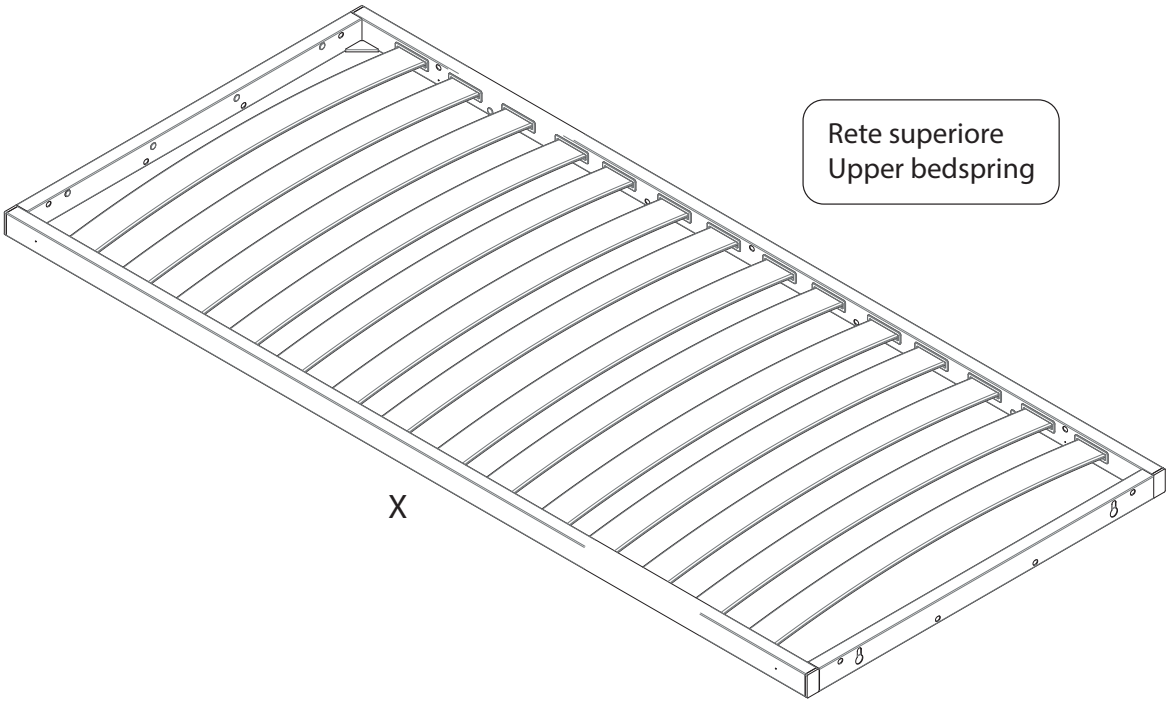

Rete superiore
Upper bedspring

X

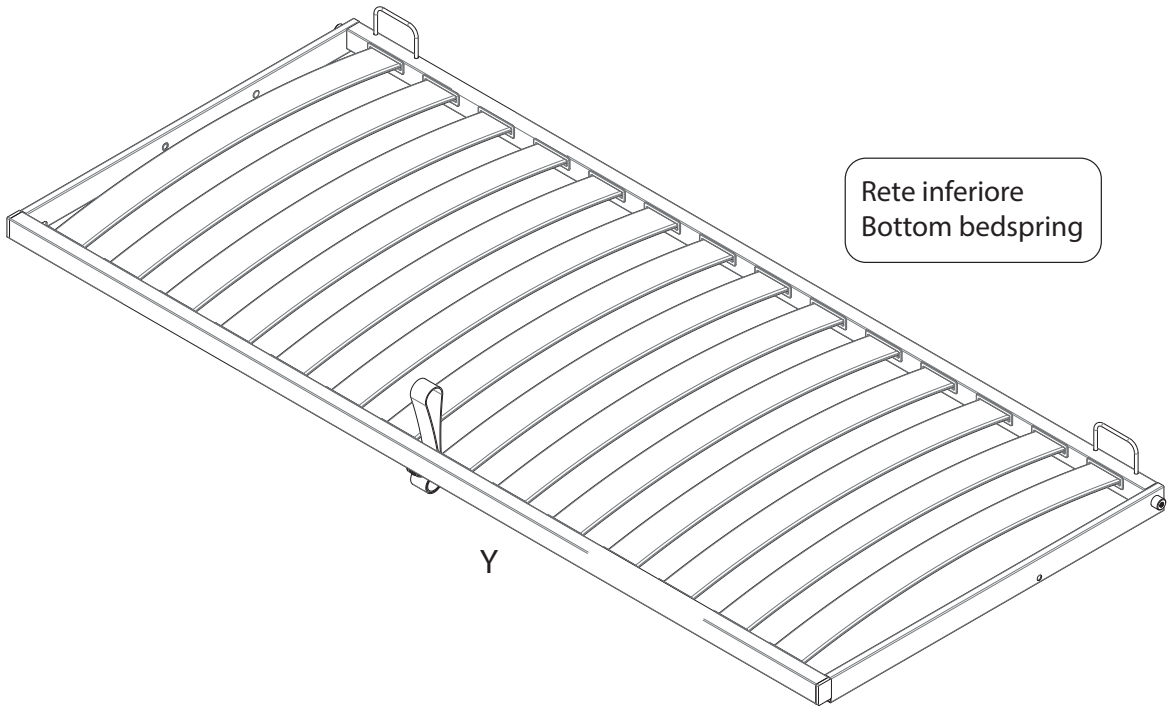



Rete inferiore
Bottom bedspring


Y

PESSOTTO®

STEP 01

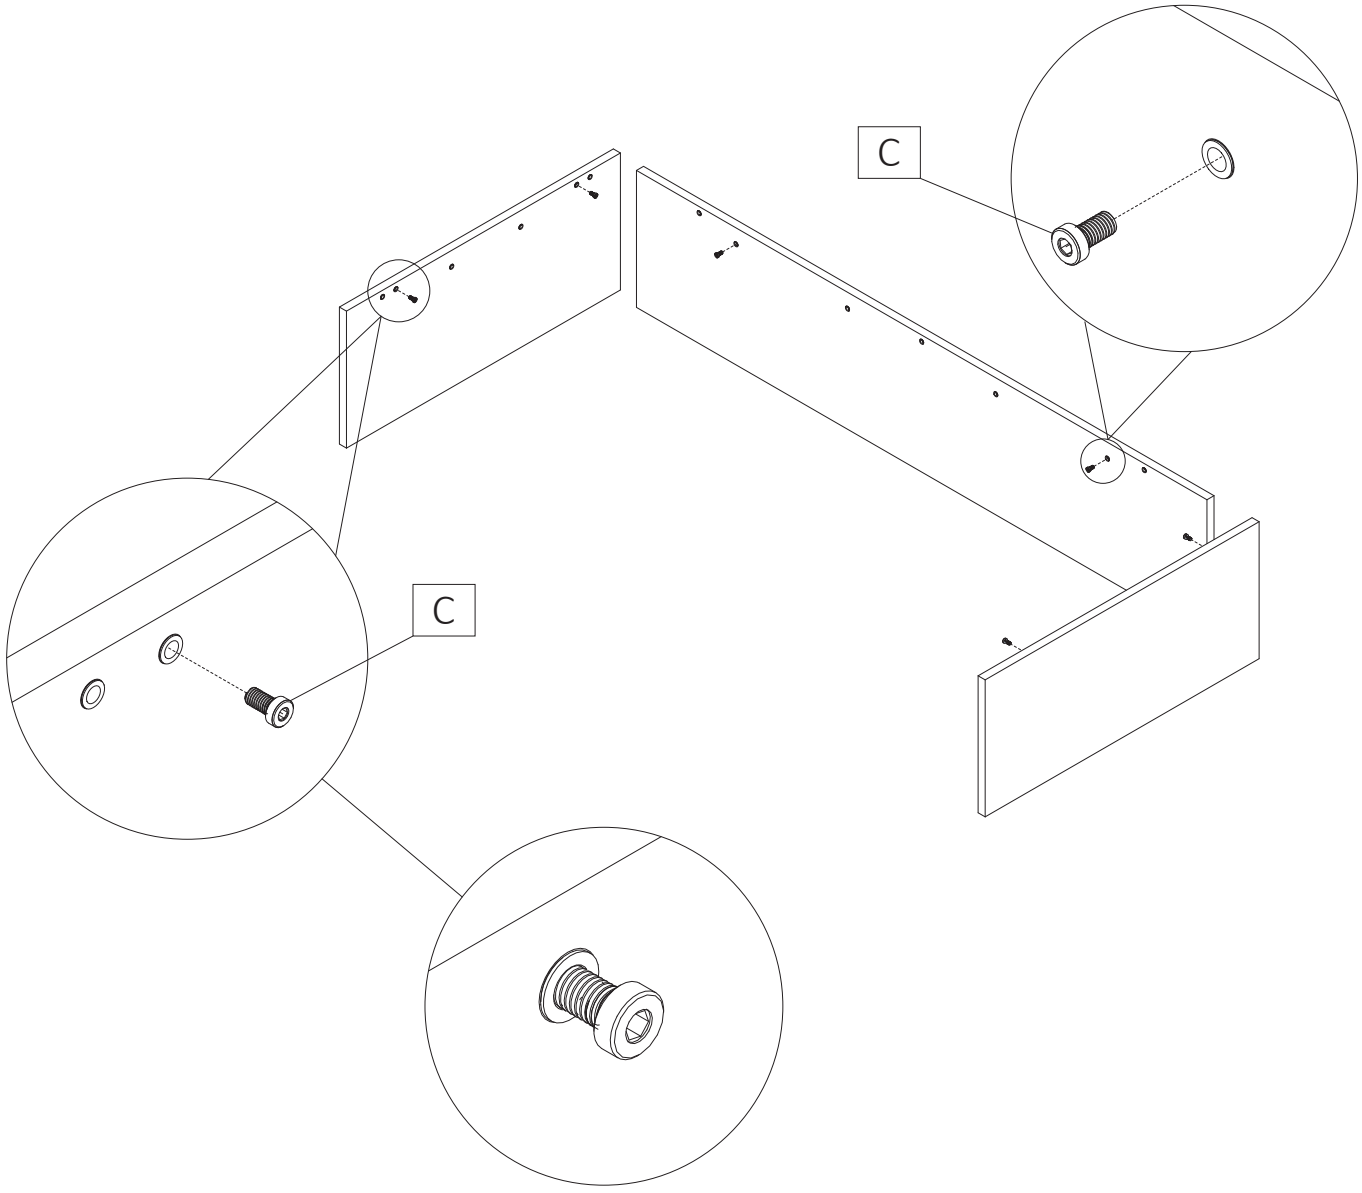


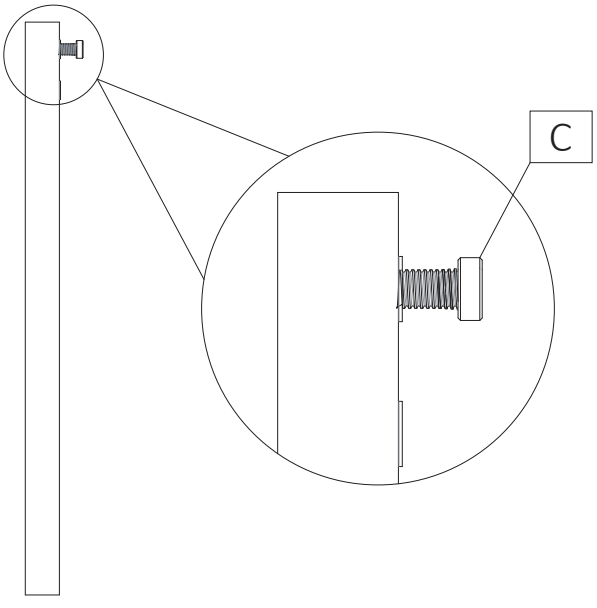

C
x6

M8X20


PESSOTTO®

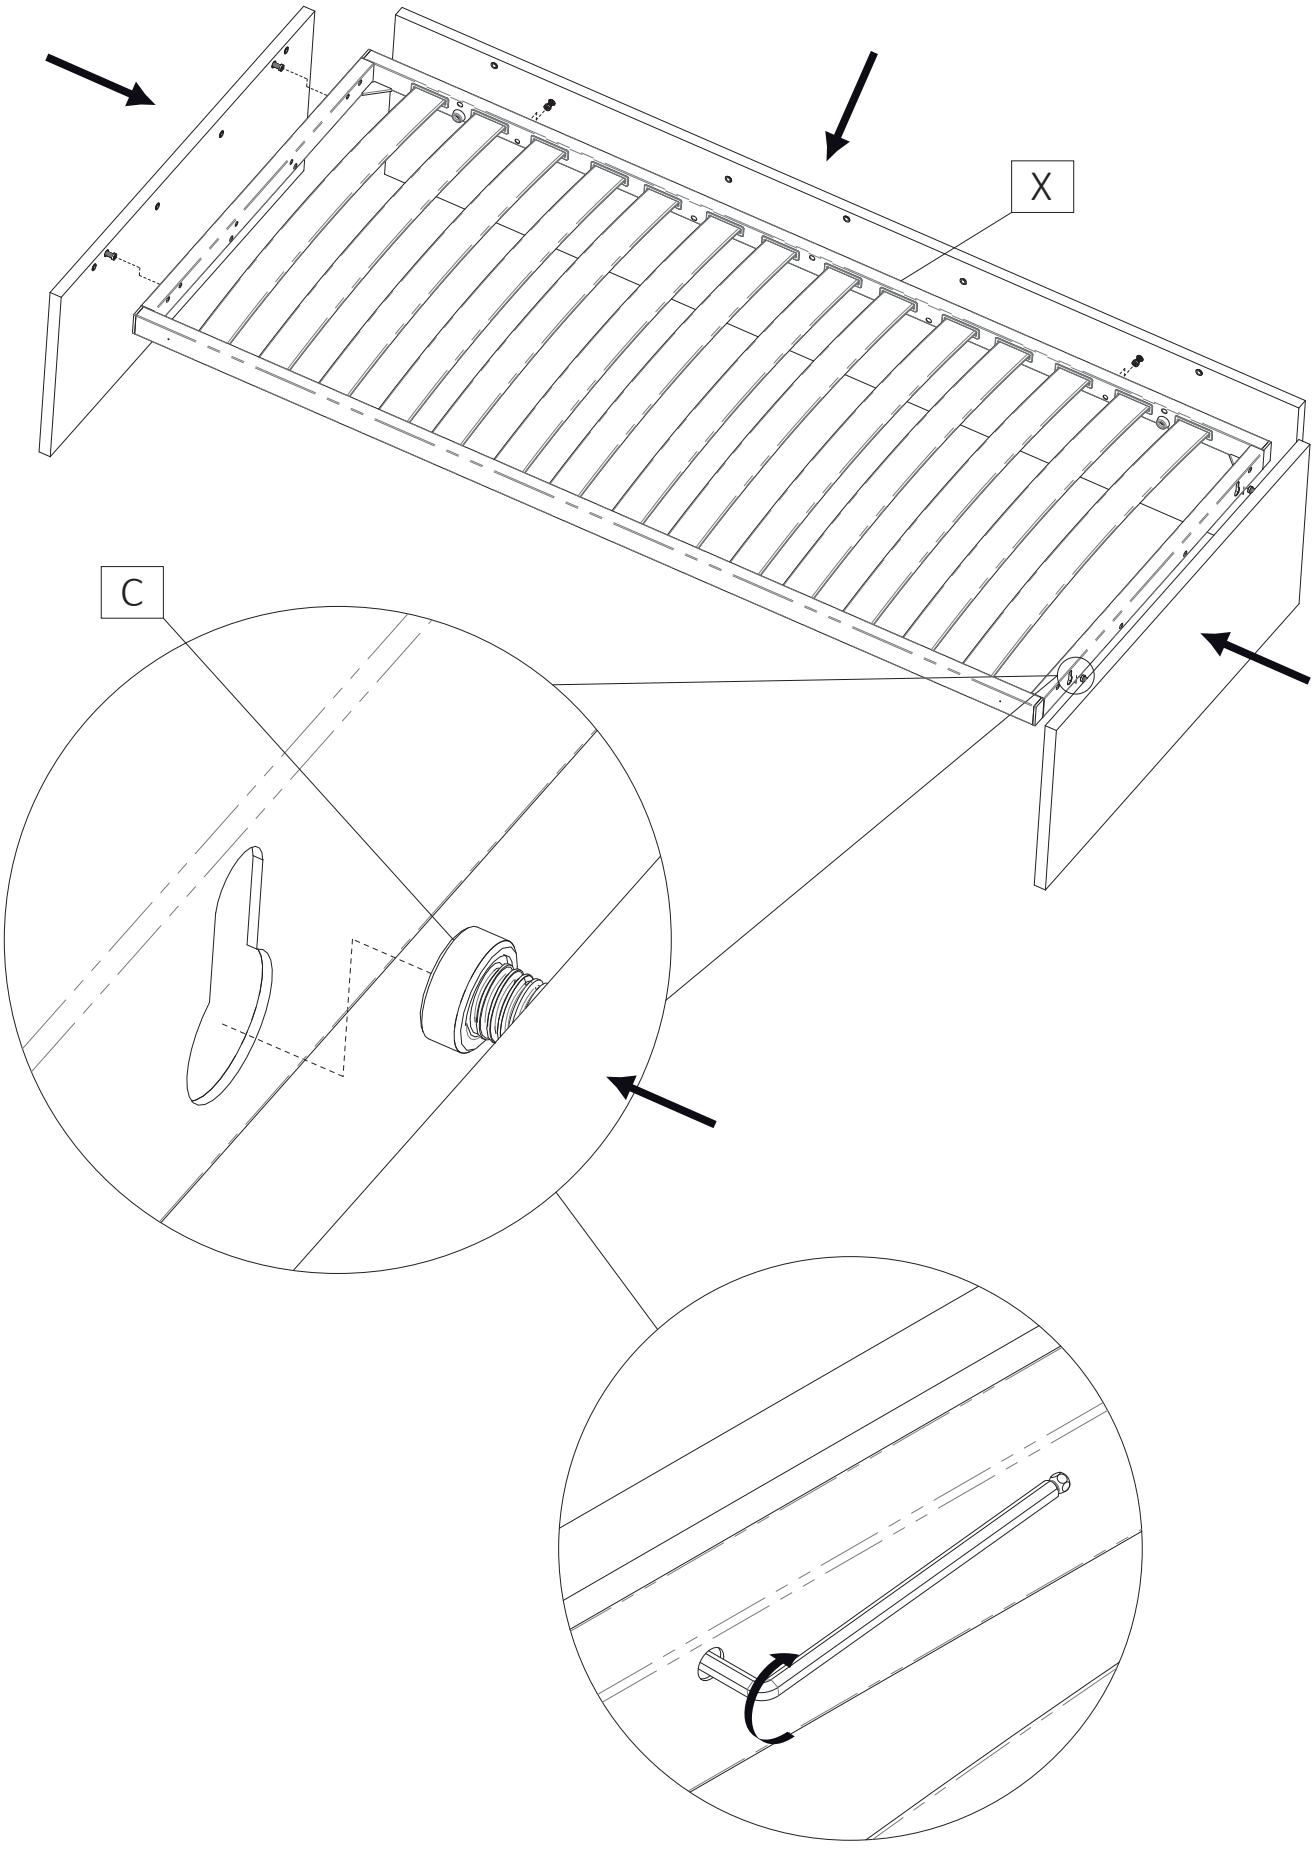
Step 02



PESSOTTO®


STEP 03



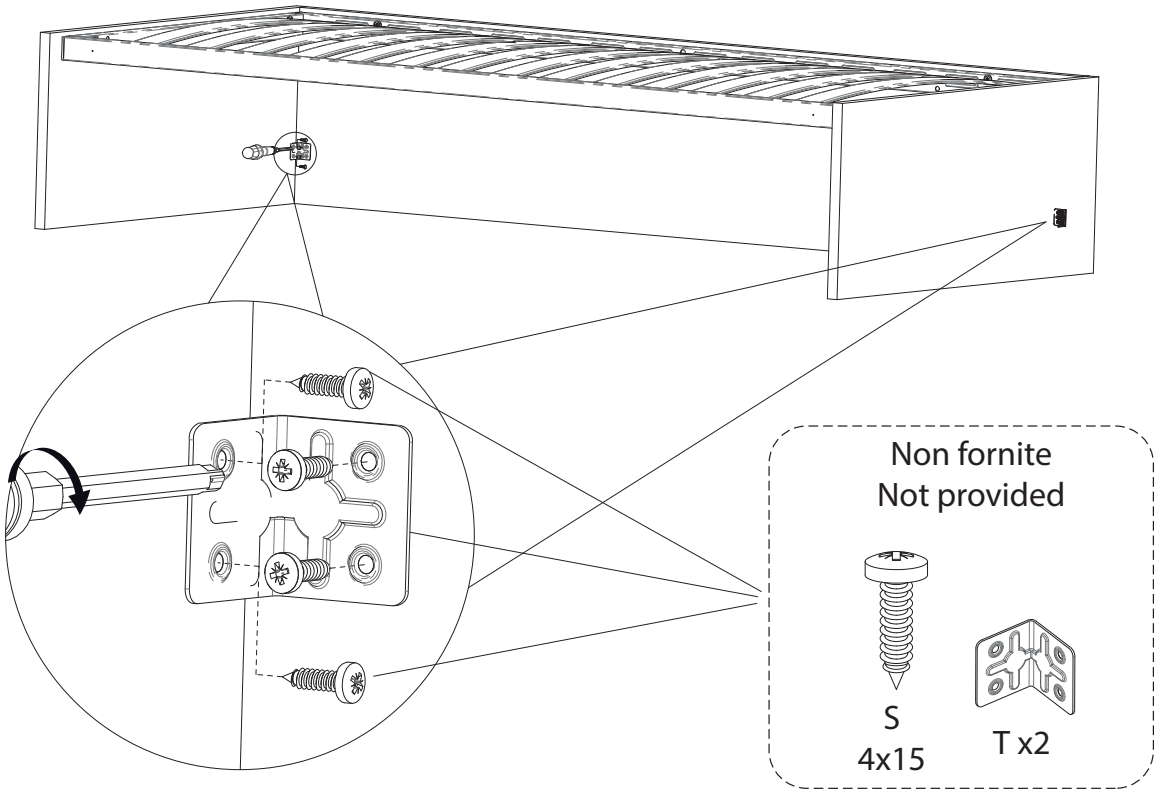


STEP 04

Barra posteriore - back bar

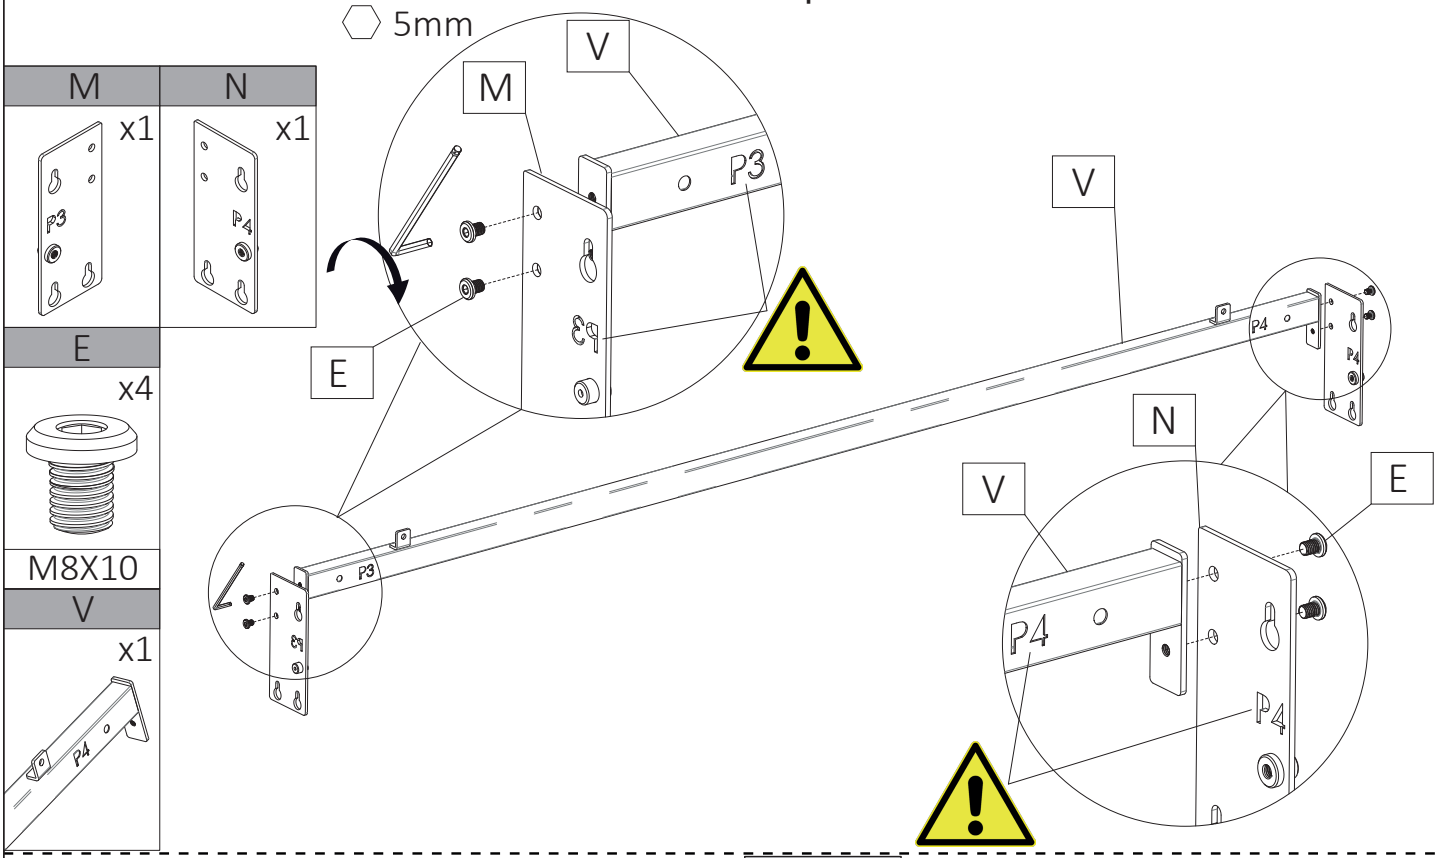


Barra anteriore - front bar

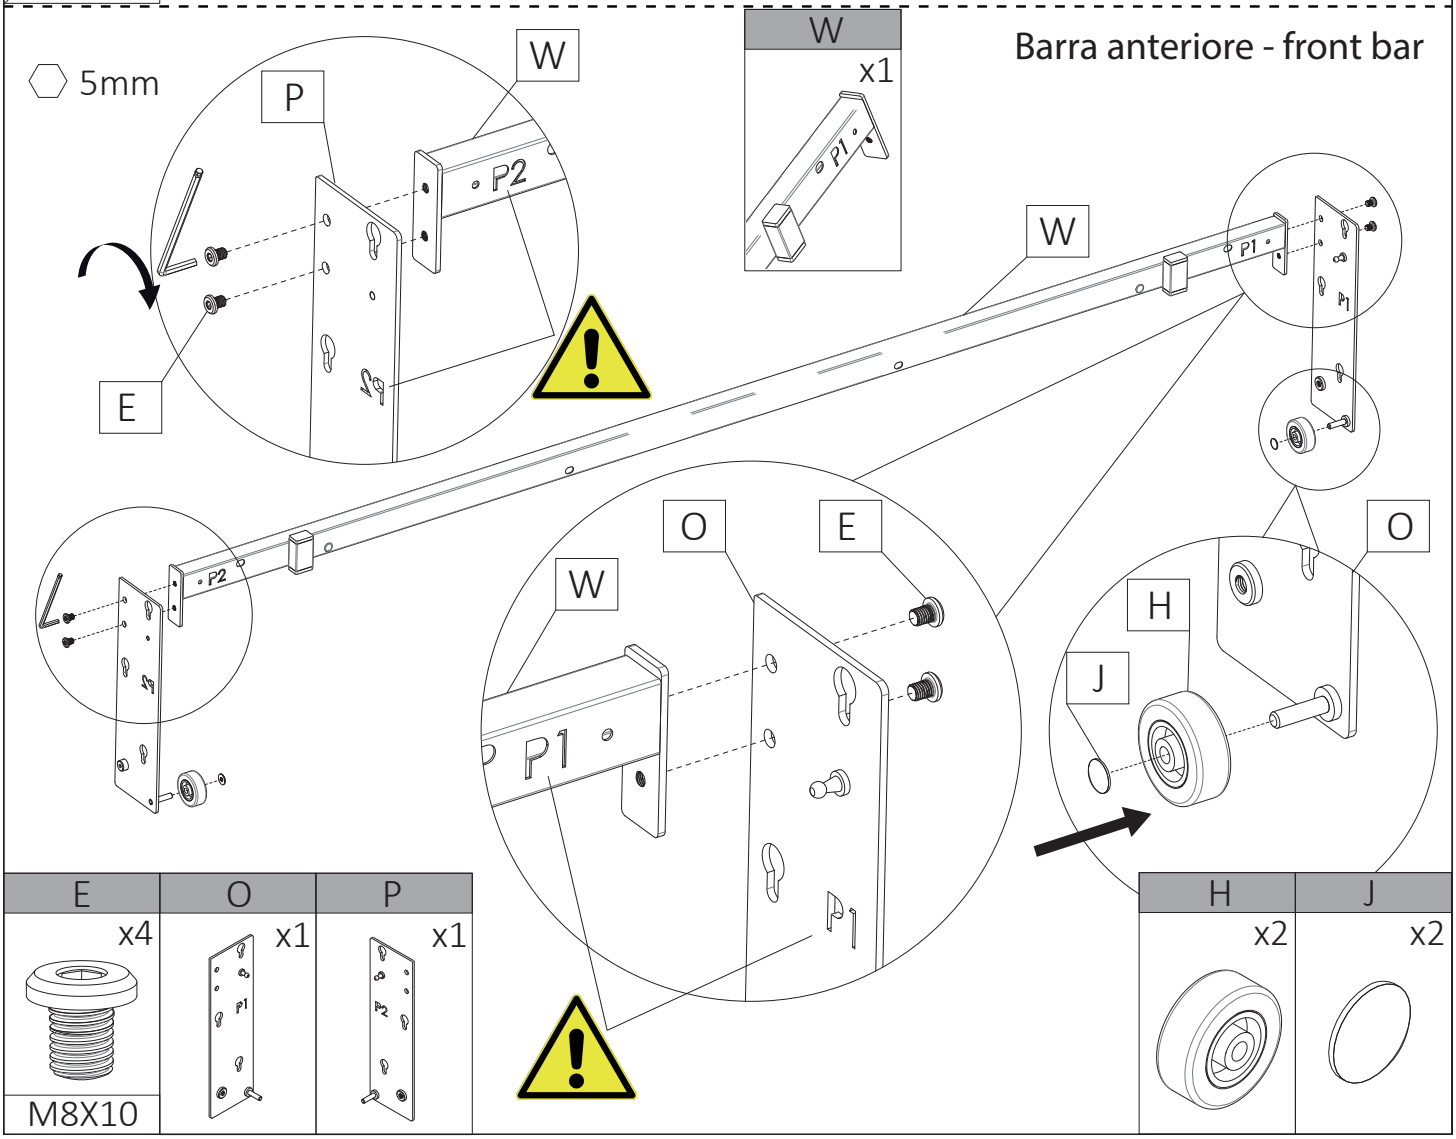

PESSOTTO®

STEP 05

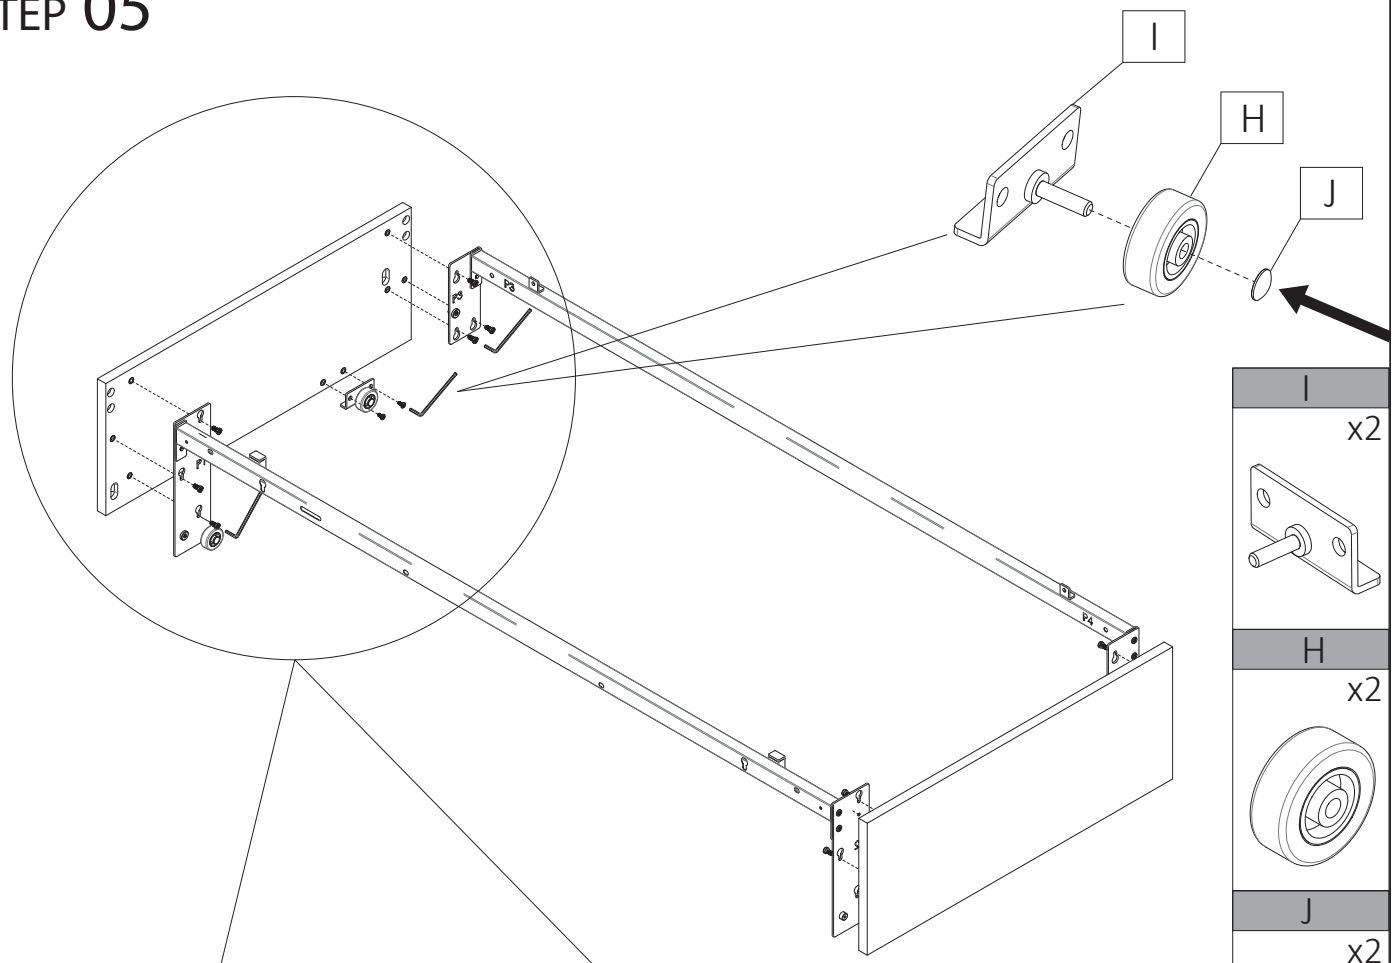


I
x2

H
x2

J
x2



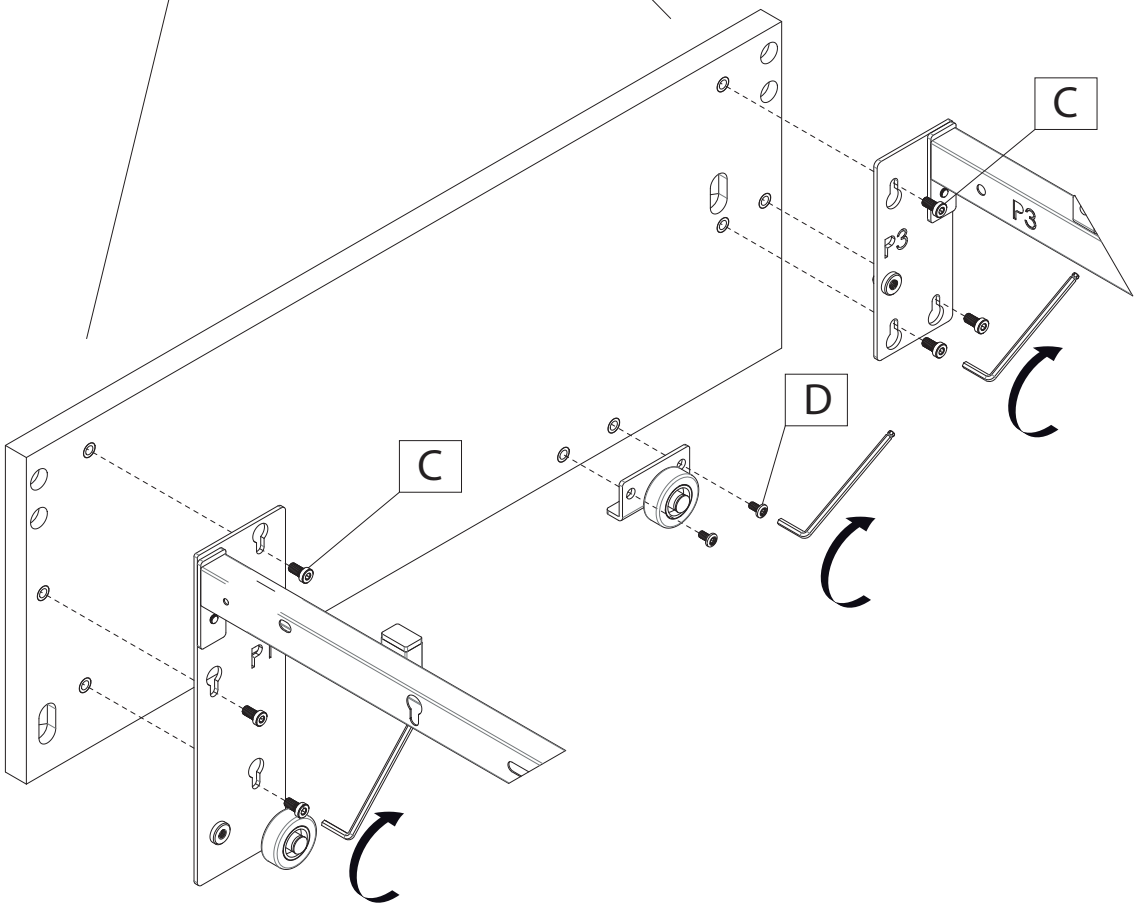


C
x12



M8X20


D
x4





M8X15

PESSOTTO®


STEP 06

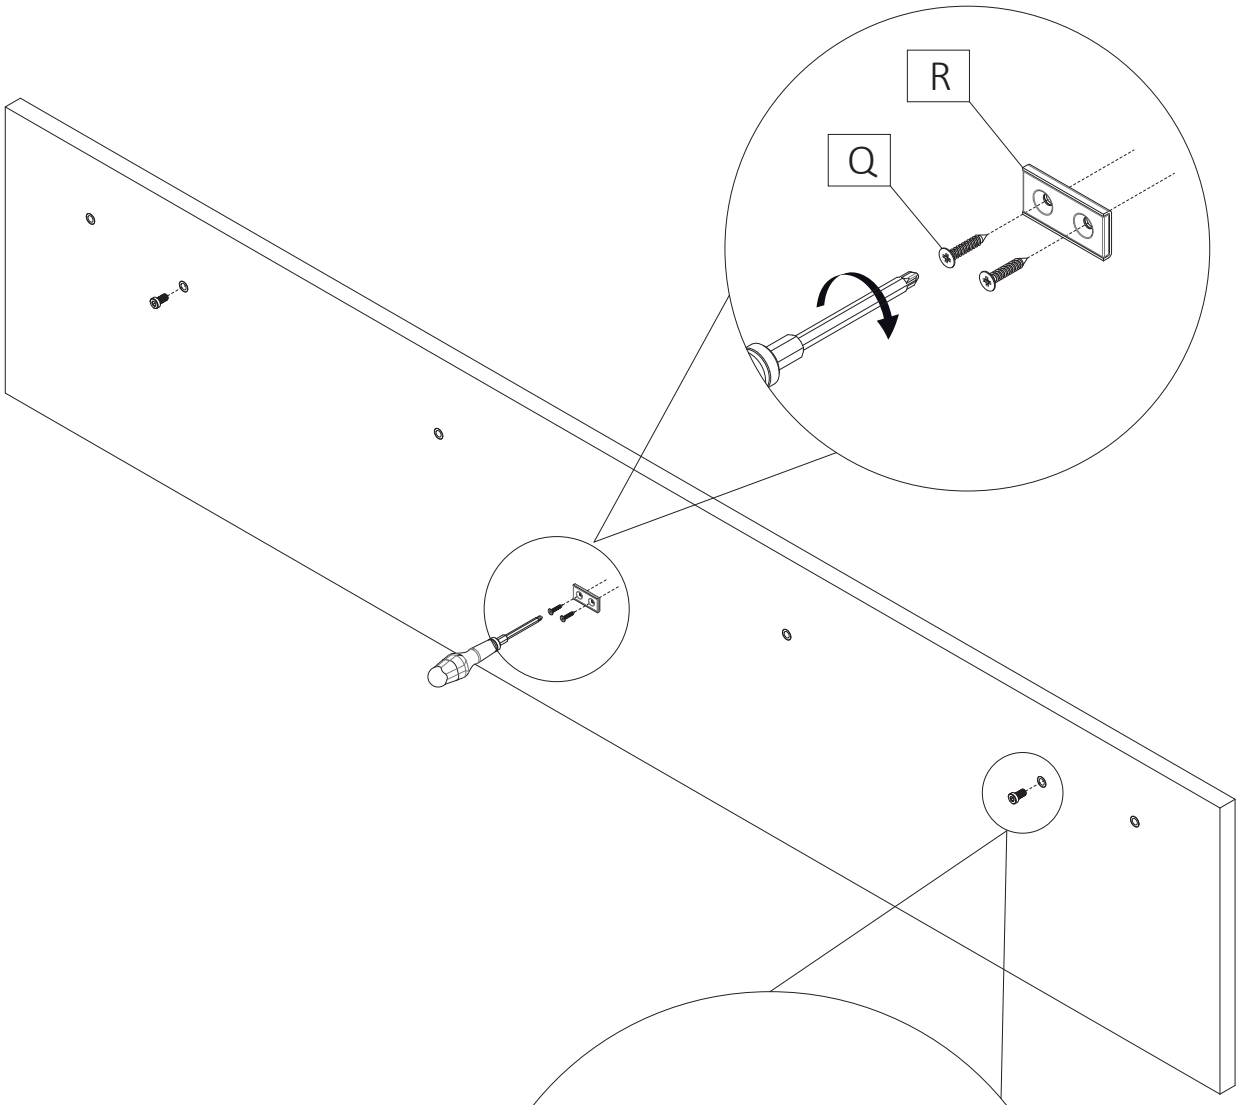

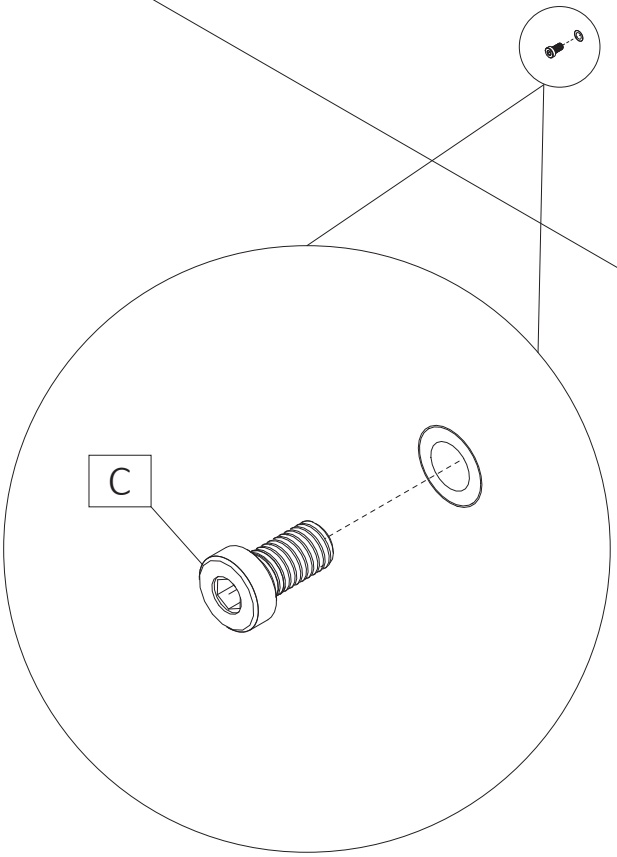

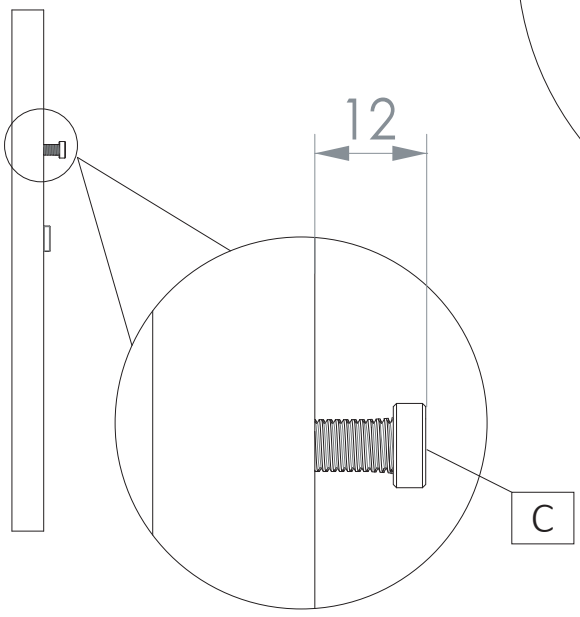


C
x2




M8X20

Q
x2




R
x1




PESSOTTO®


Step 07

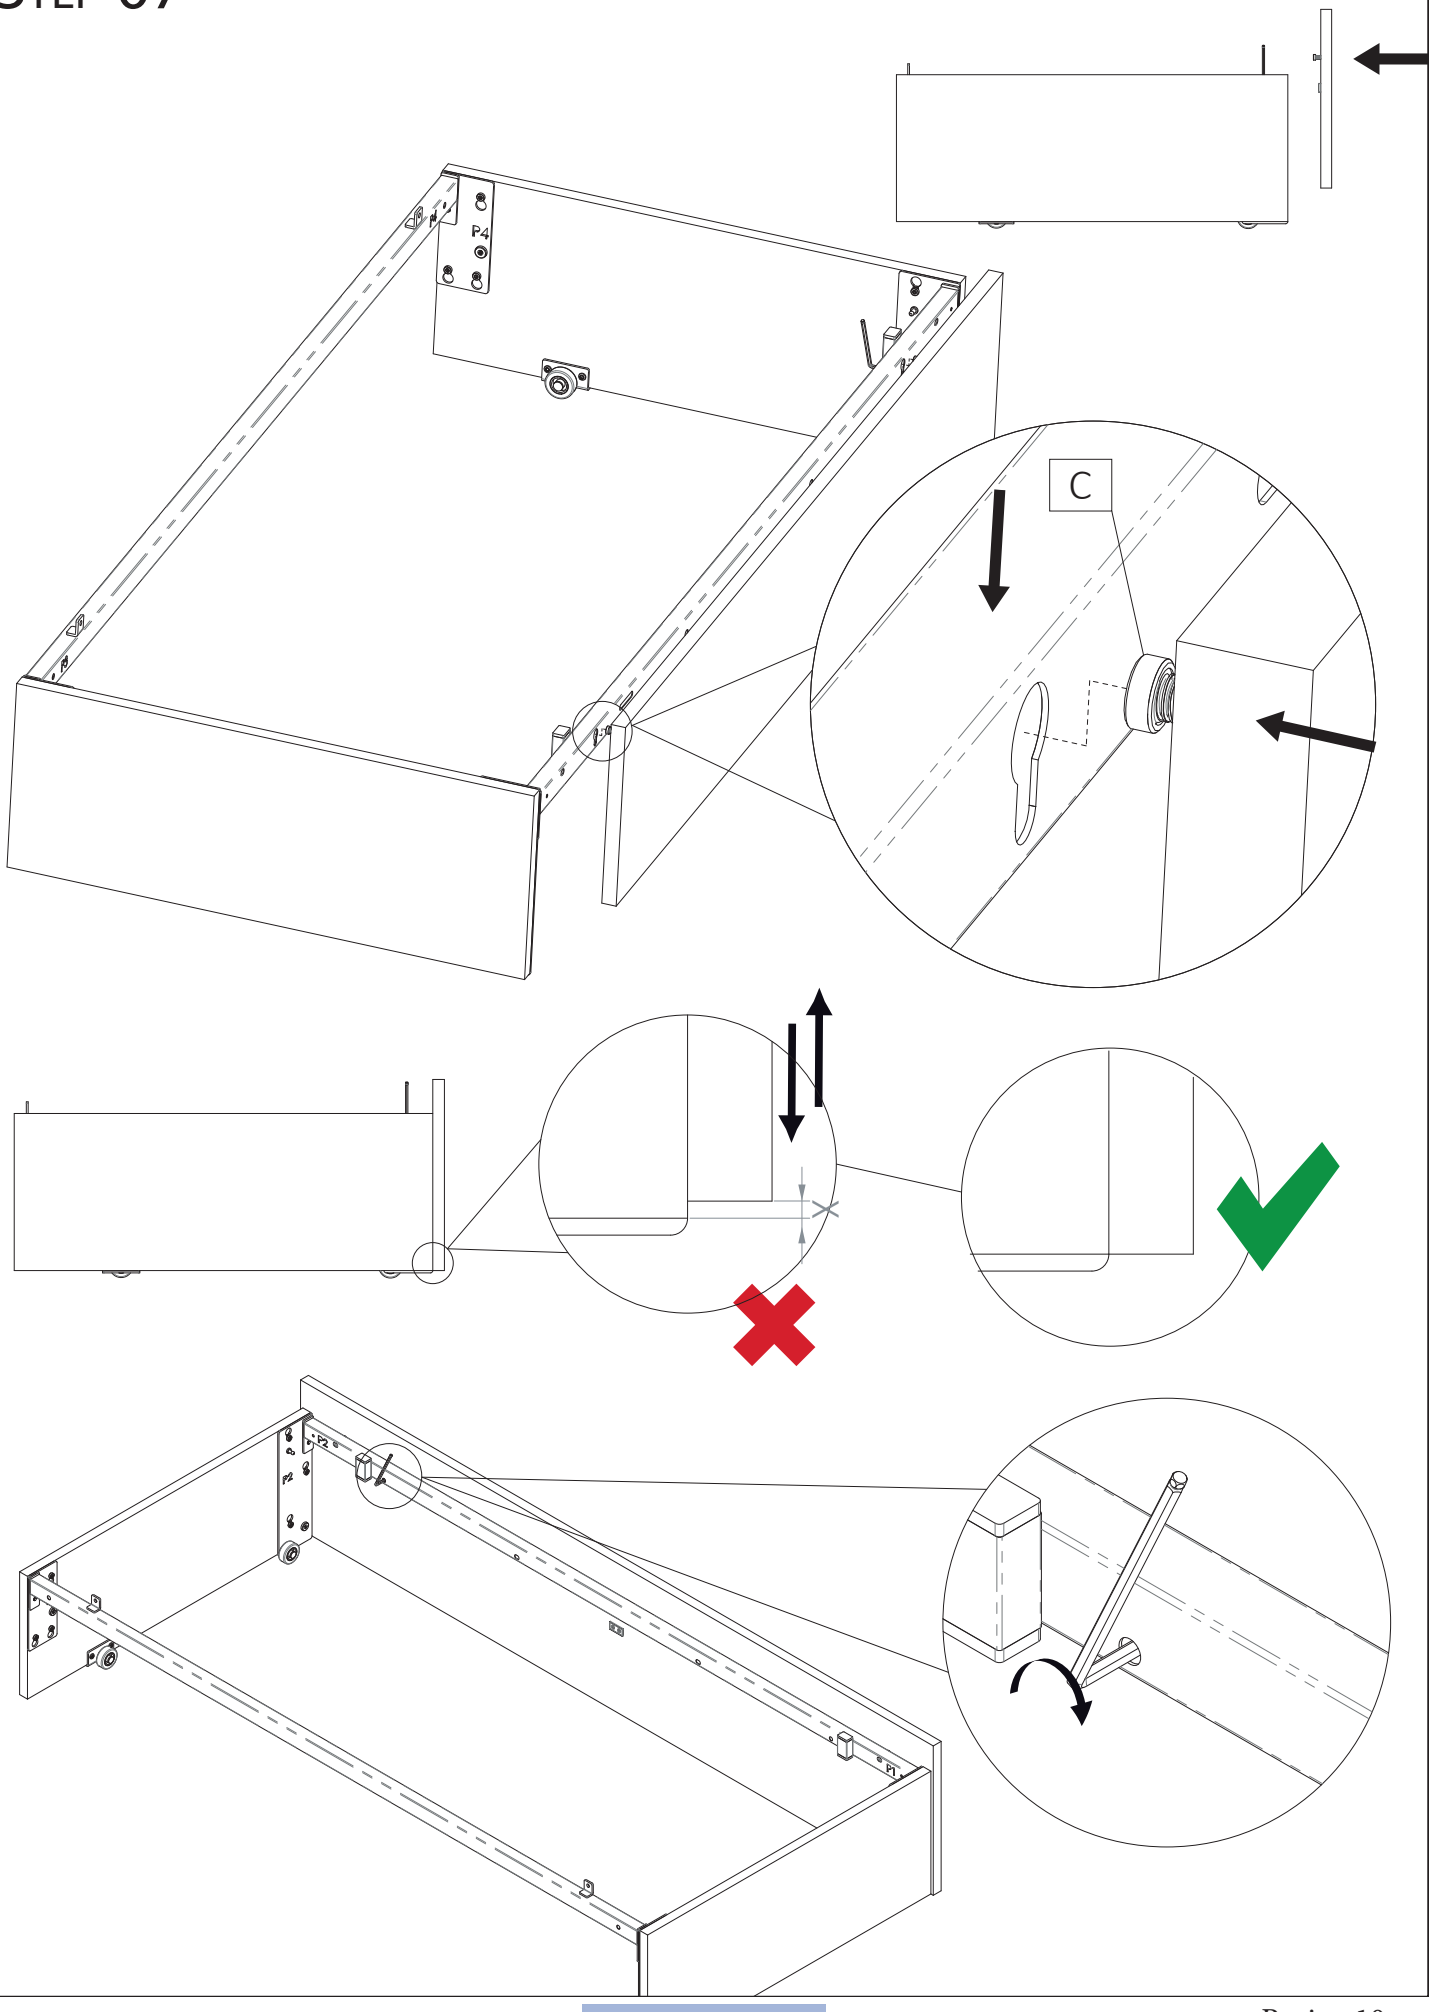


PESSOTTO®



Step 08


B
x4

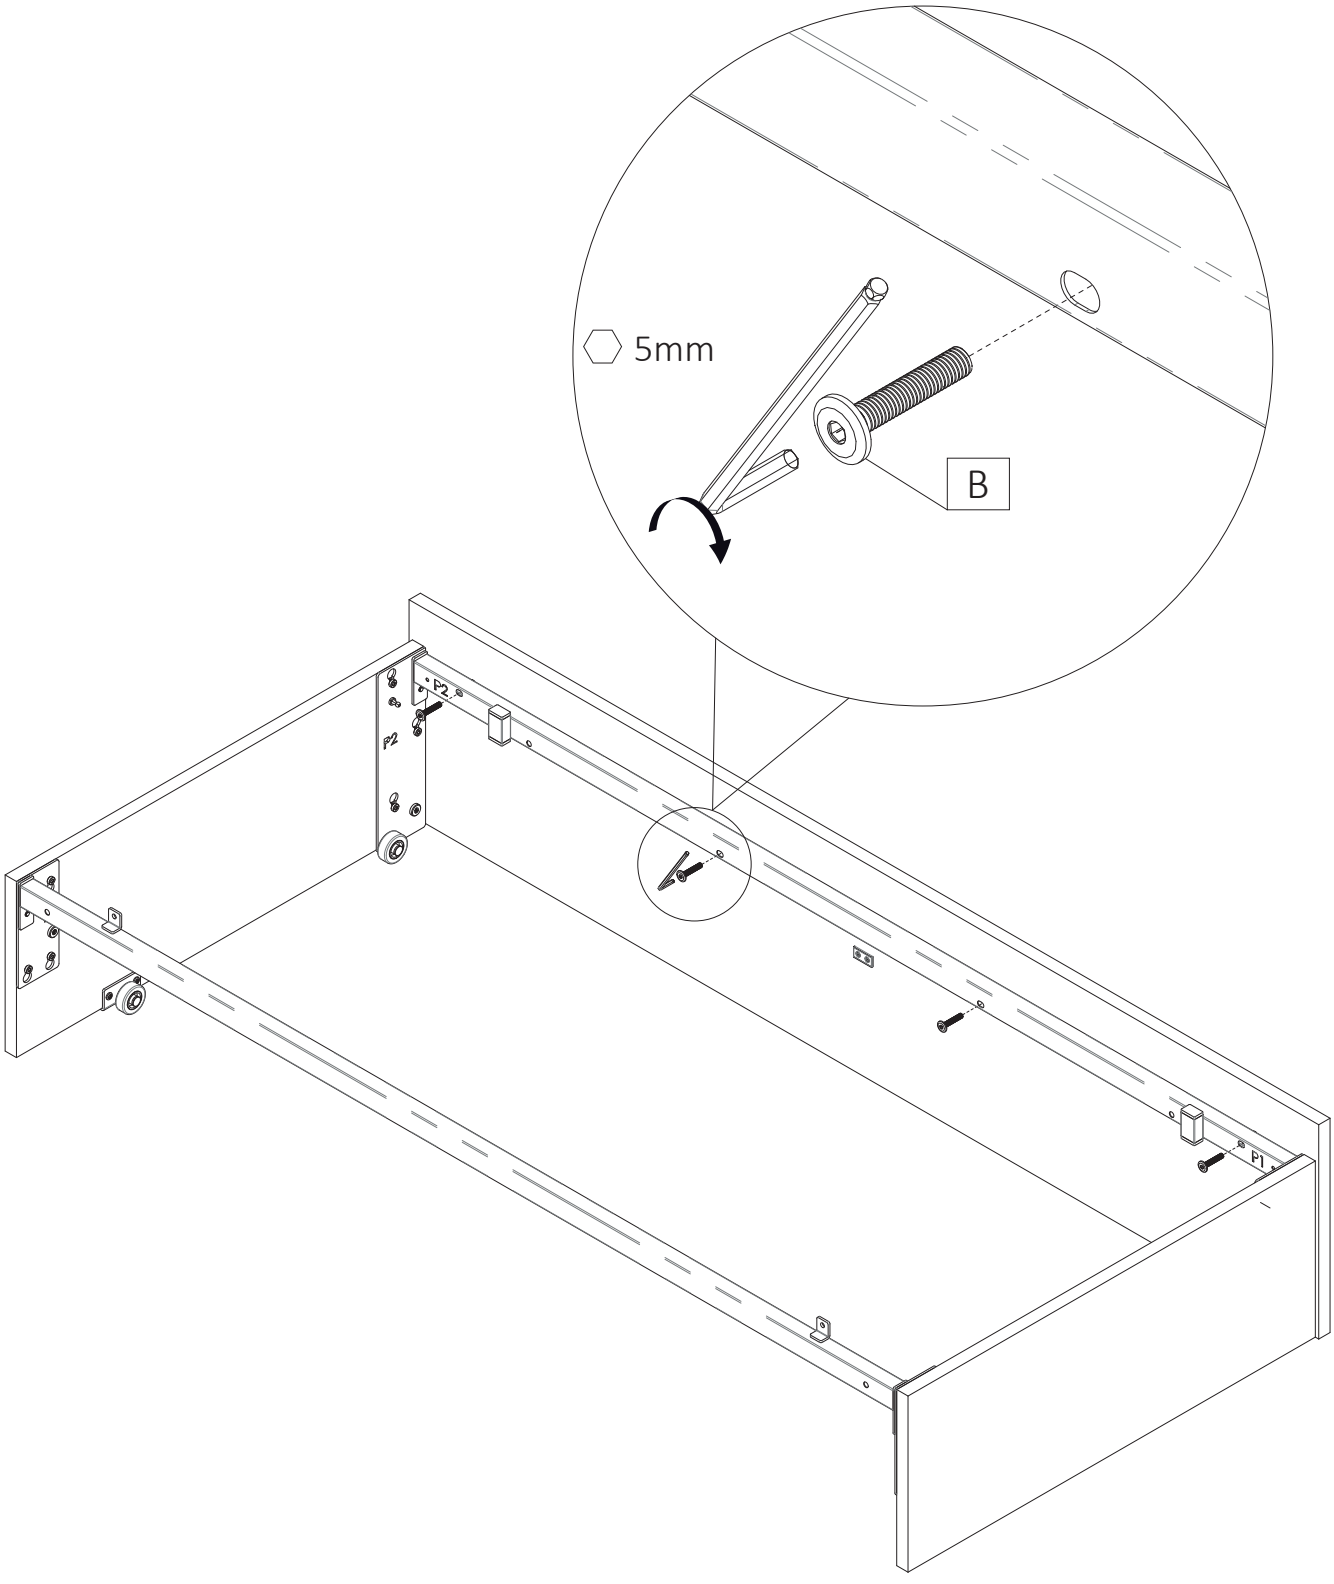M8X45





STEP 09


C	A
x2 	x2 
M8x20	M10x60

F	G
x2 	x2 
Ø10x30	M10


L
x2 

U
x1 

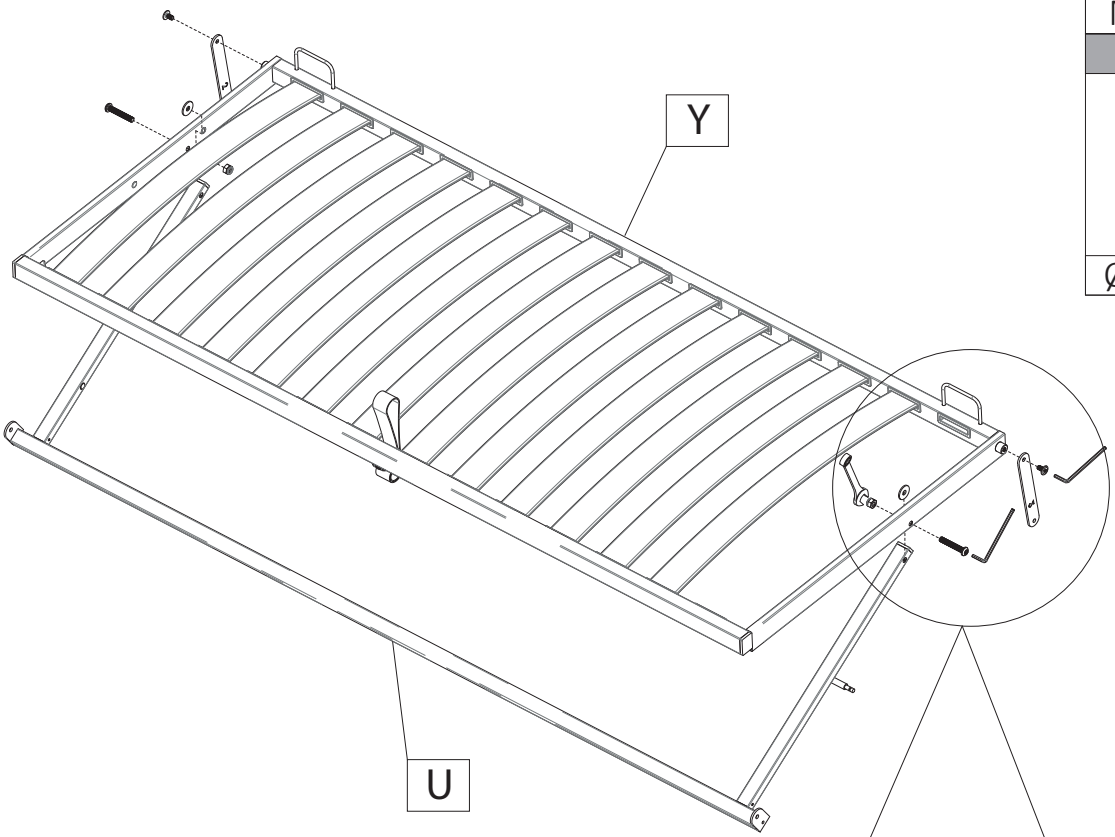


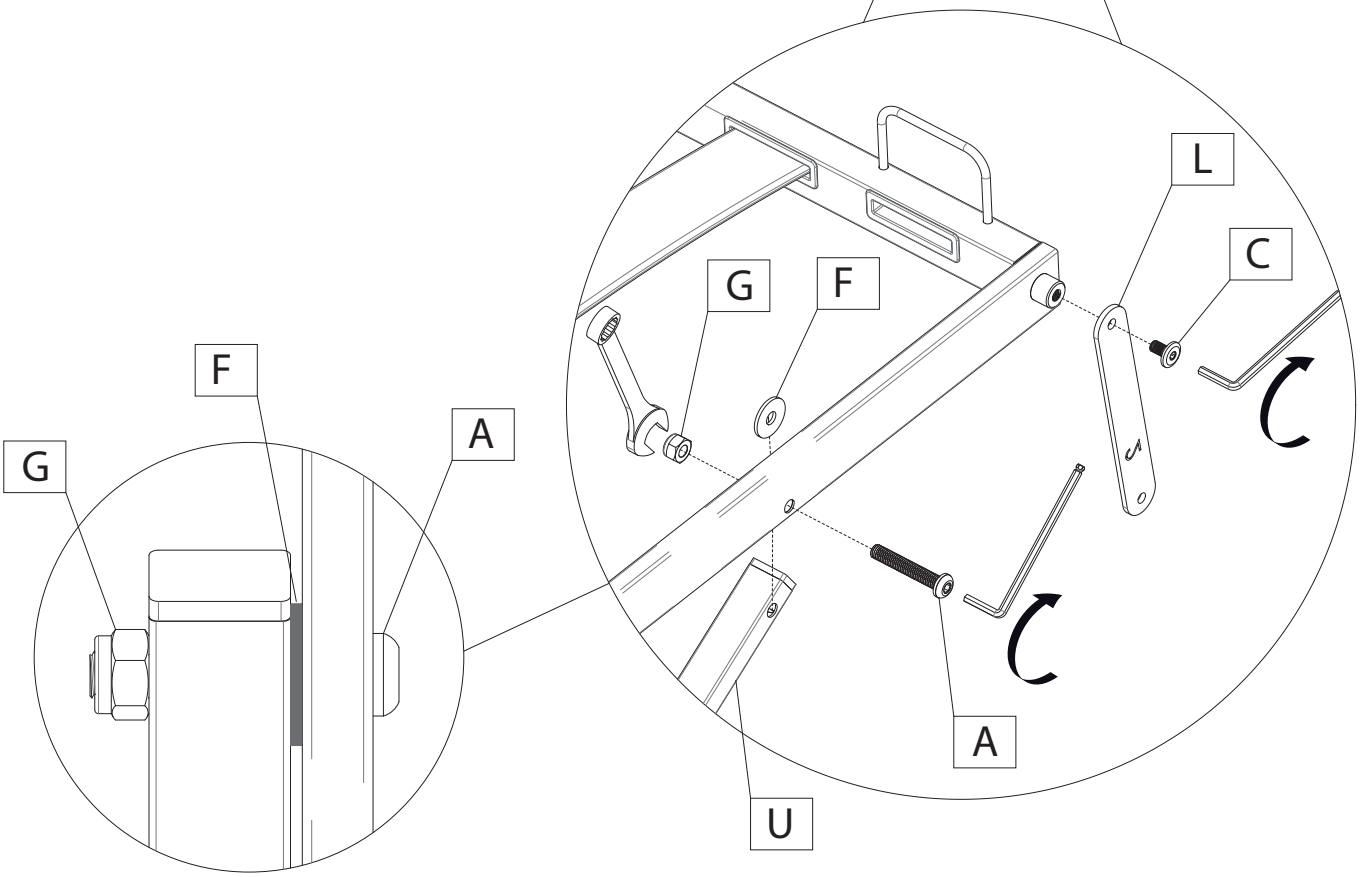



Step 10

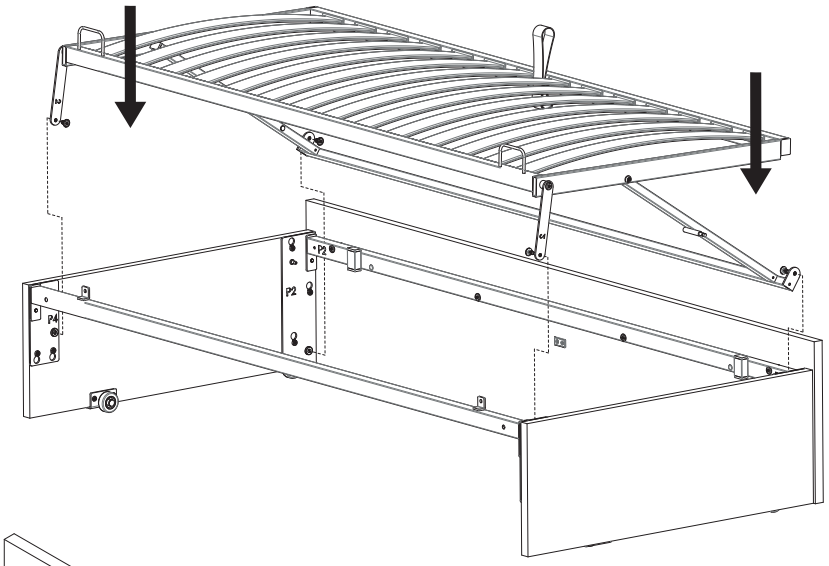

C
x4
M8x20

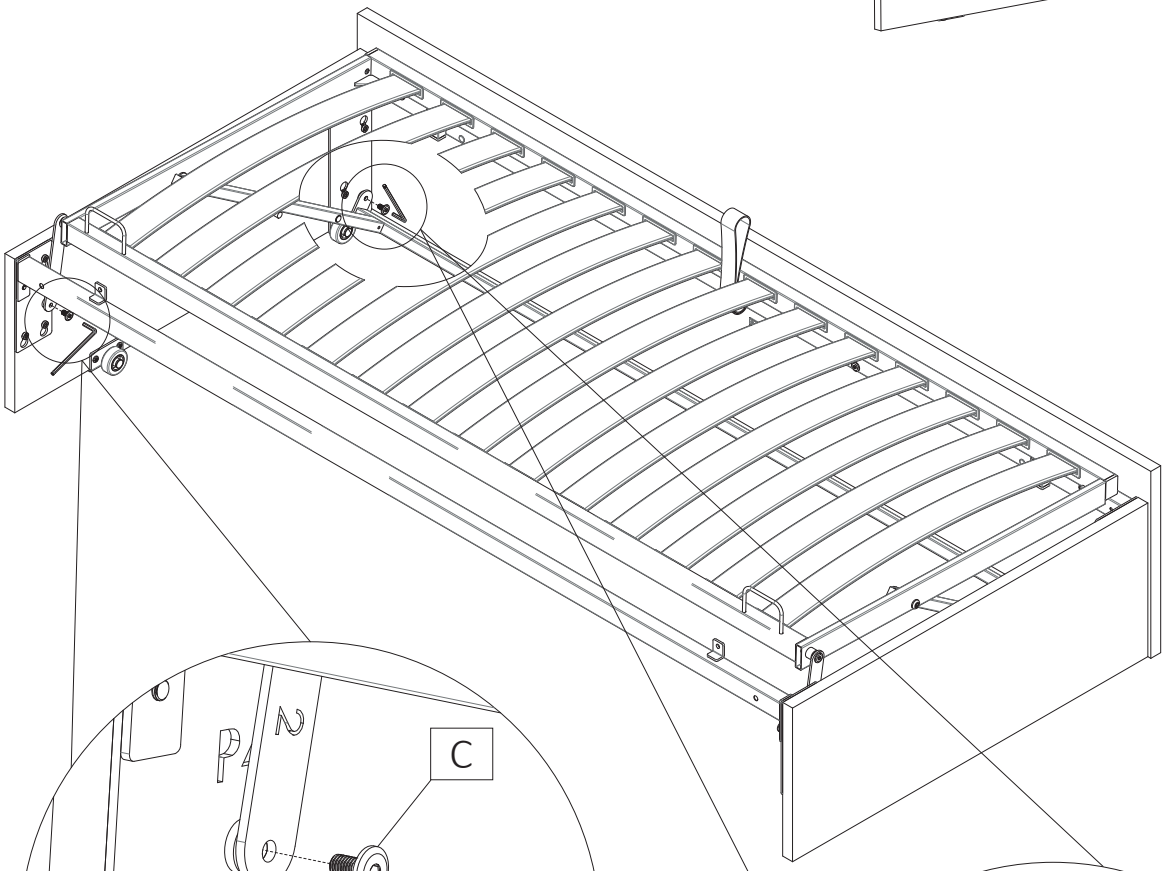


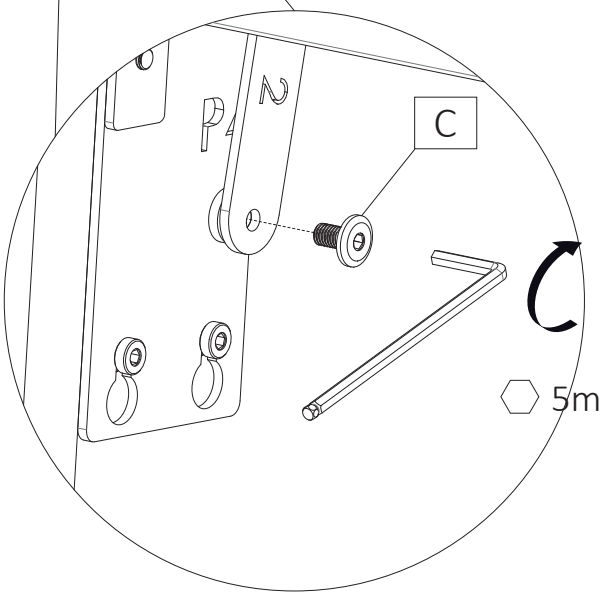

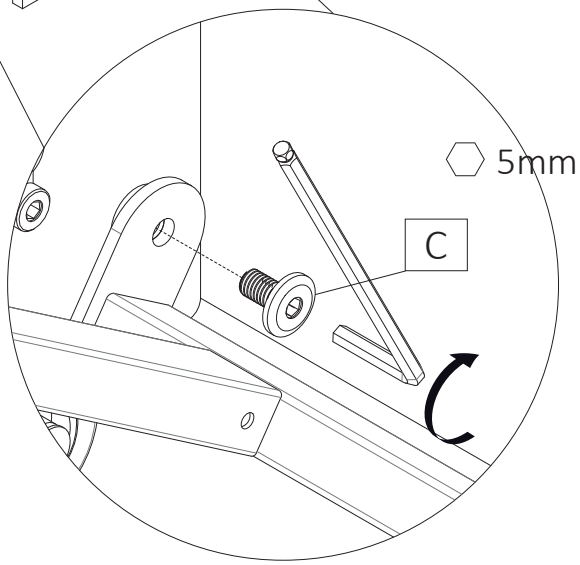



PESSOTTO®


Step 11

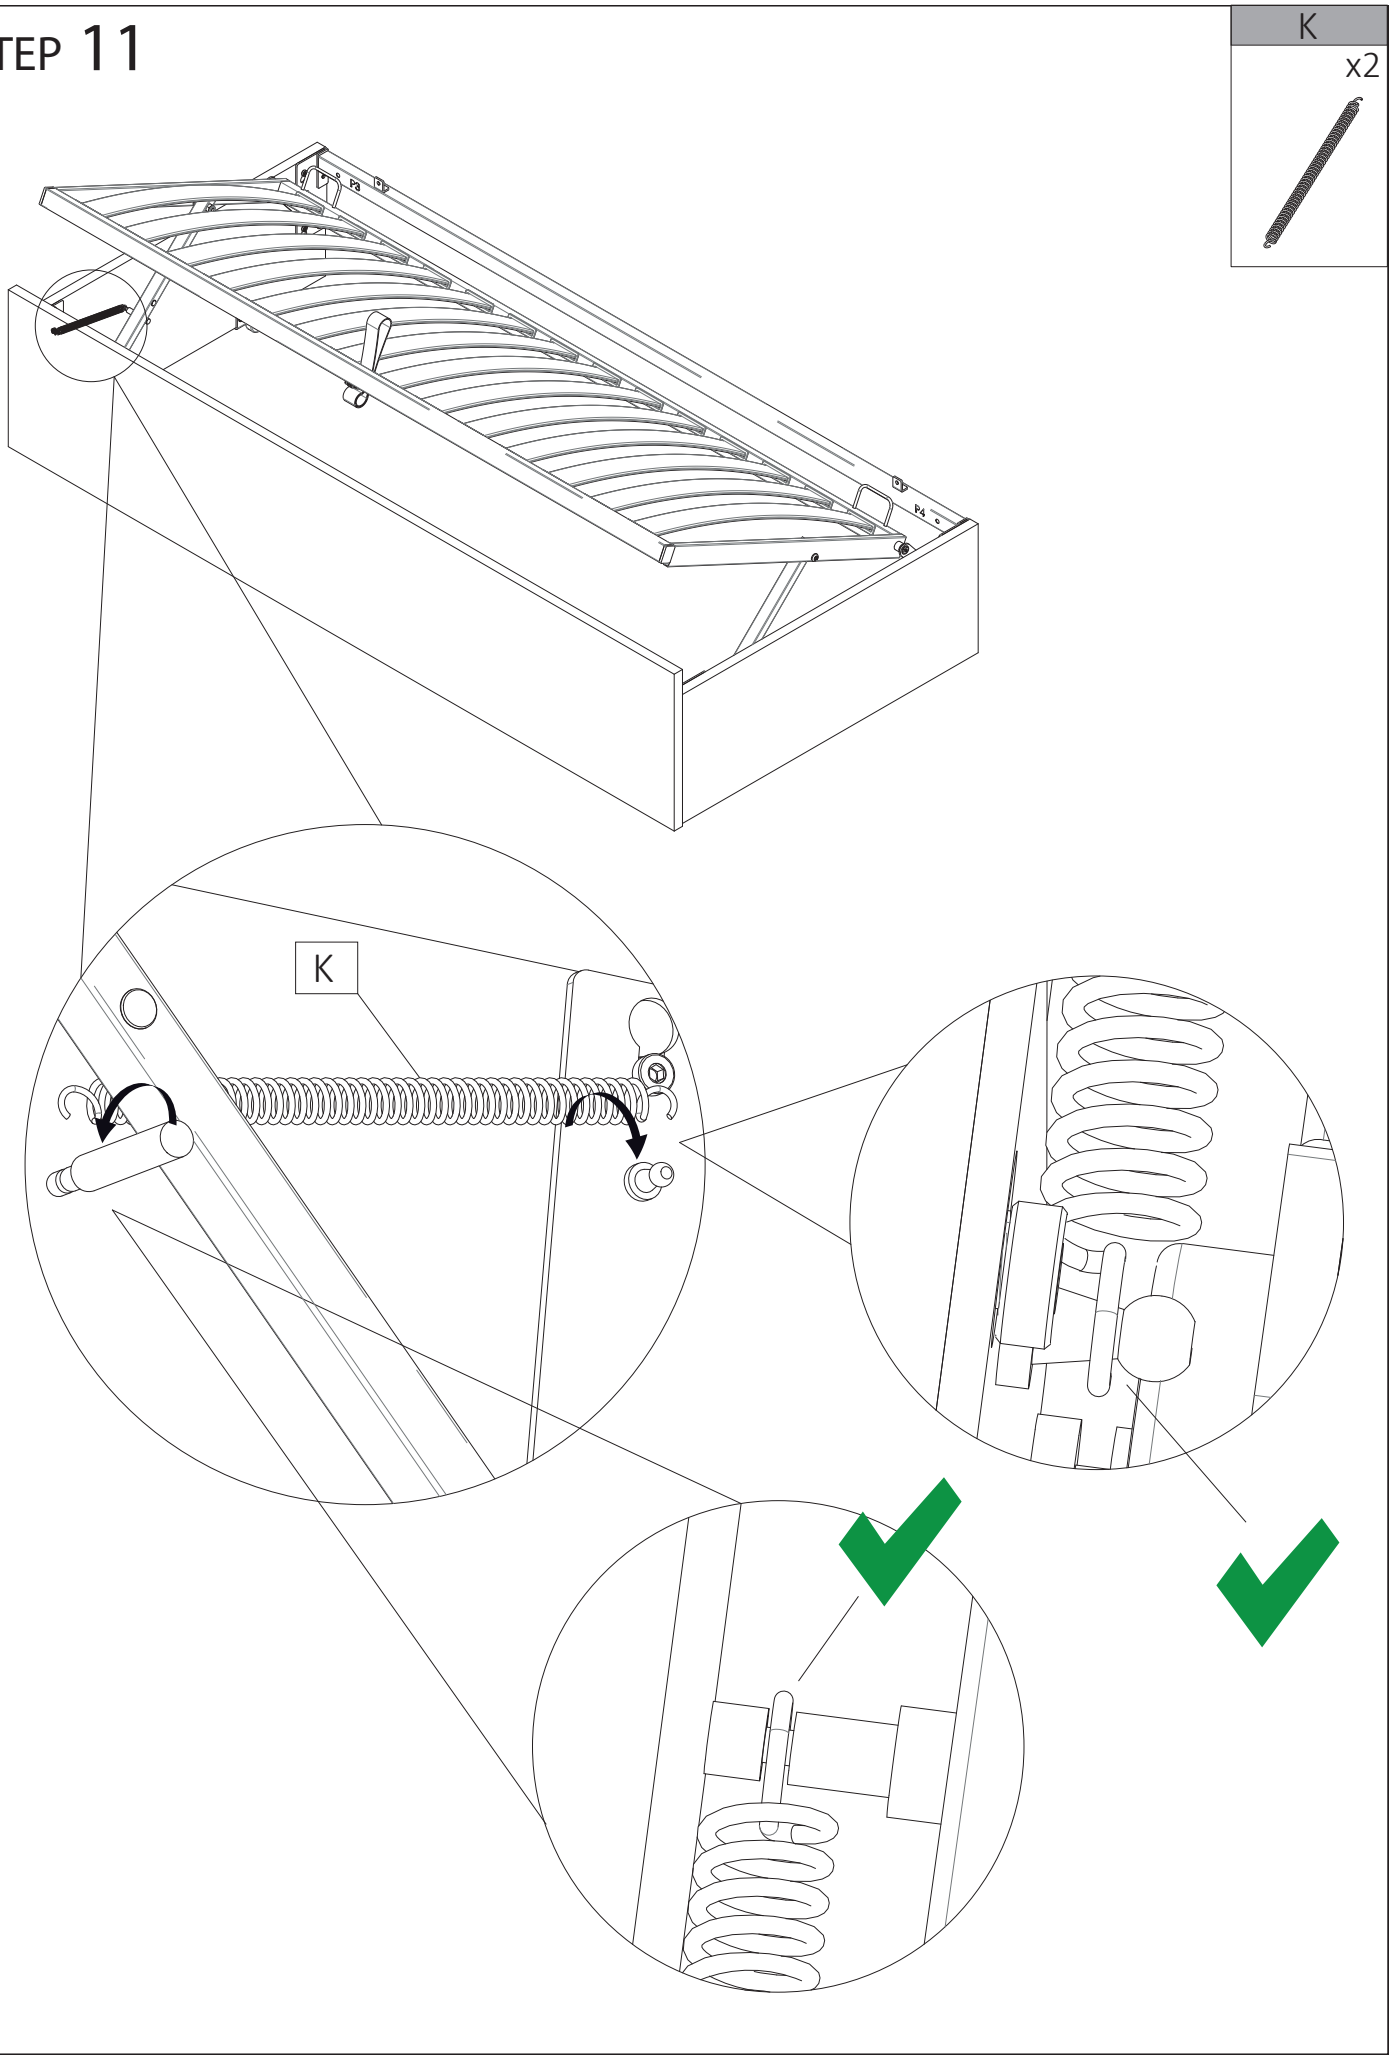

Step 12

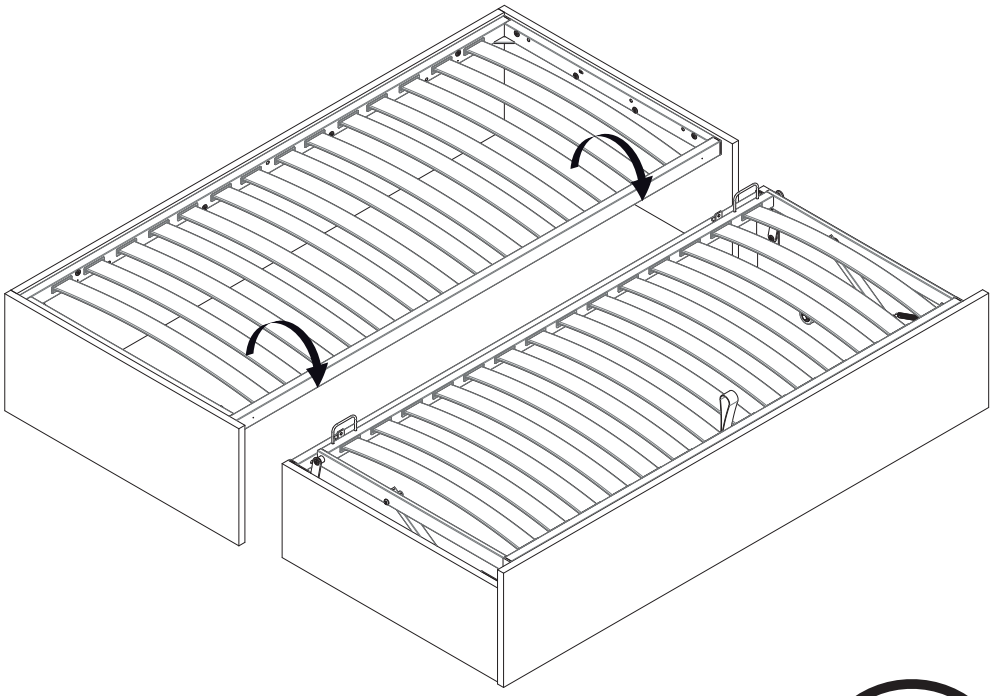


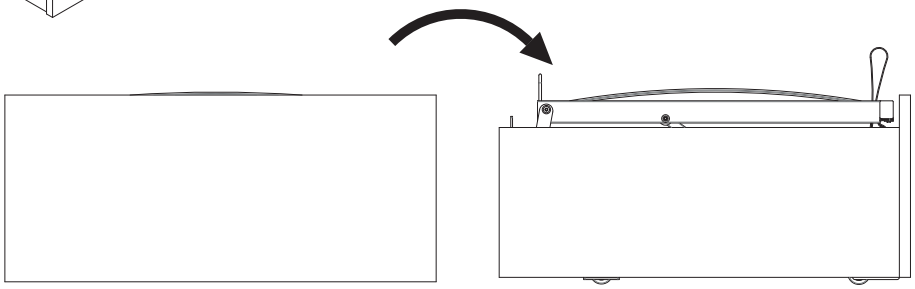

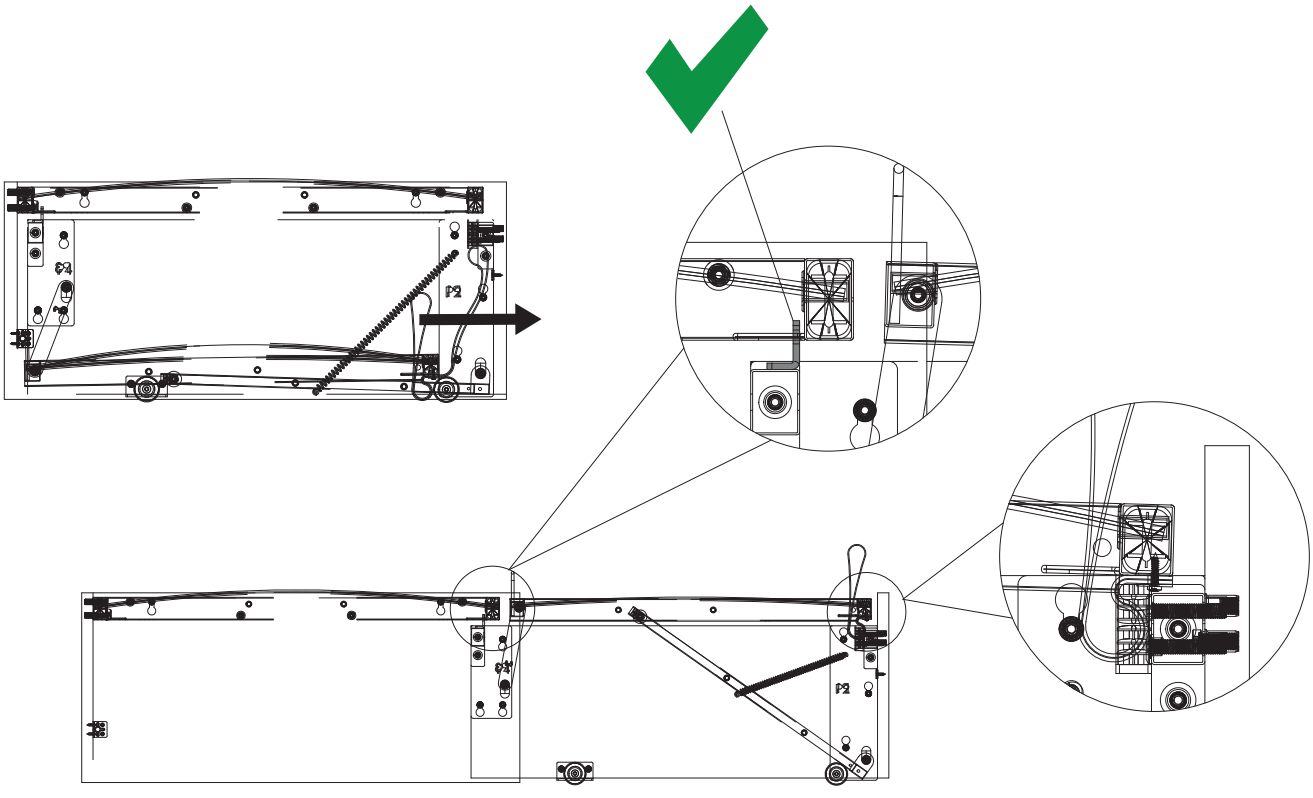



PESSOTTO®

Step 13

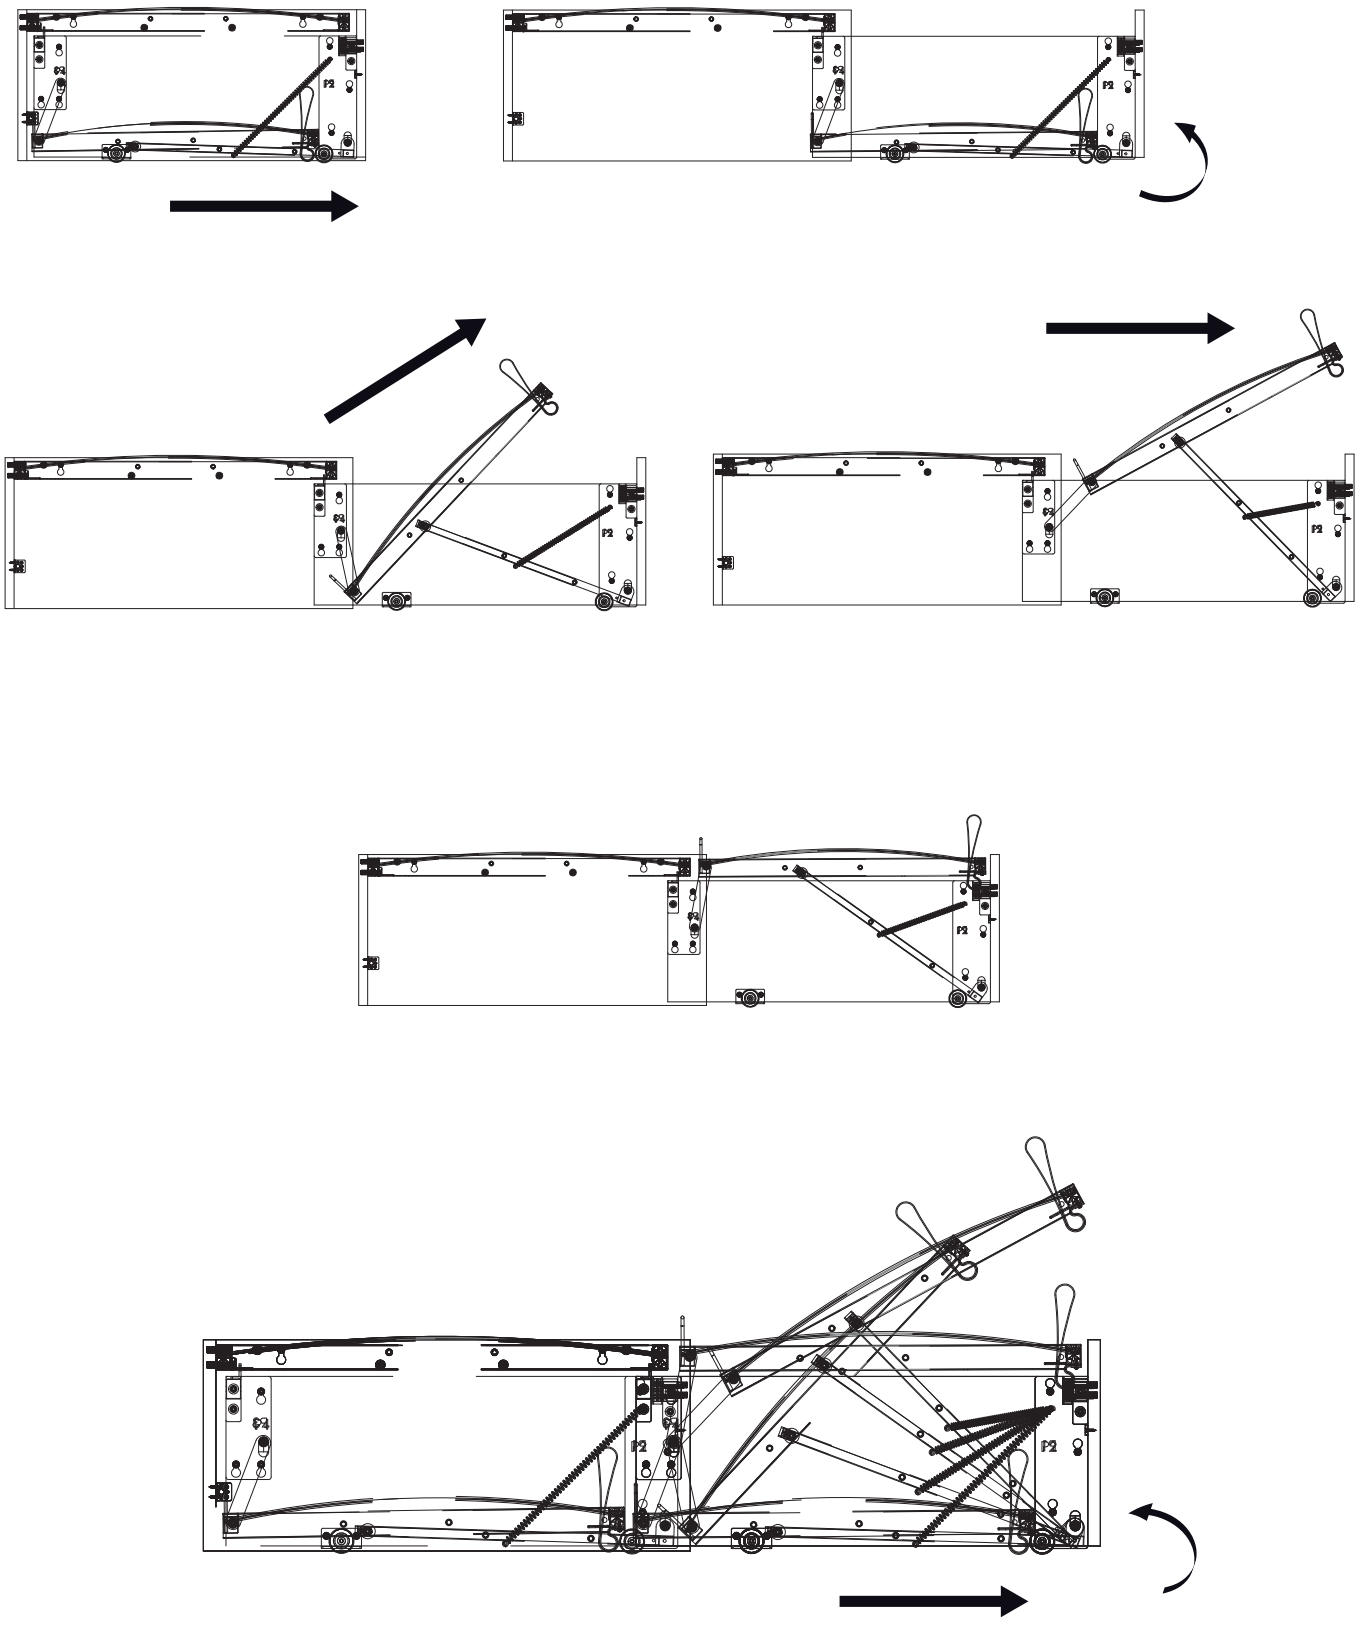


Step 14

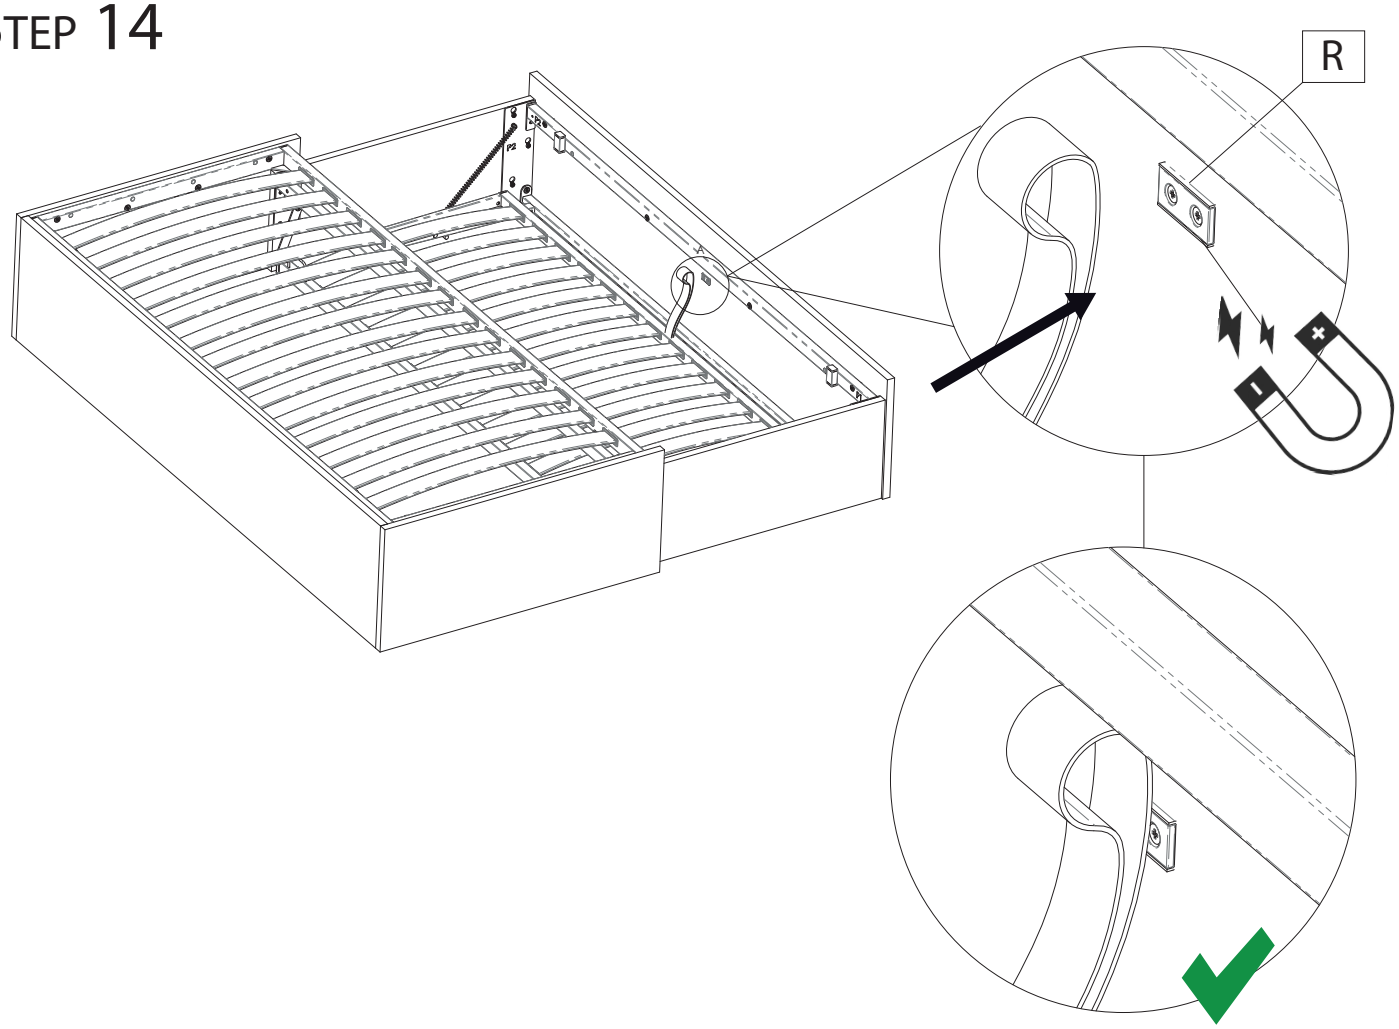

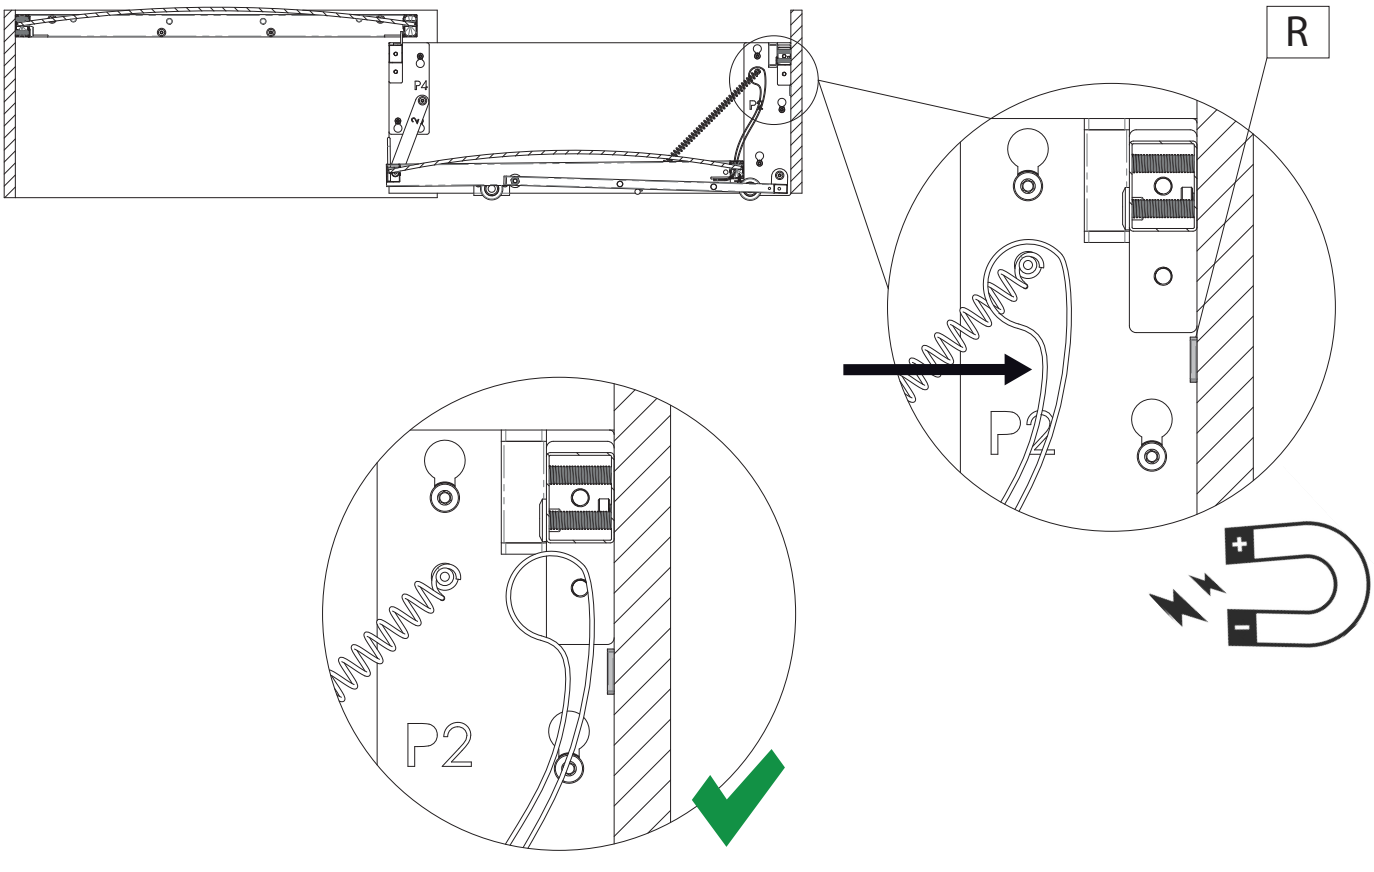



Dimensioni di ingombro / overall dimensions

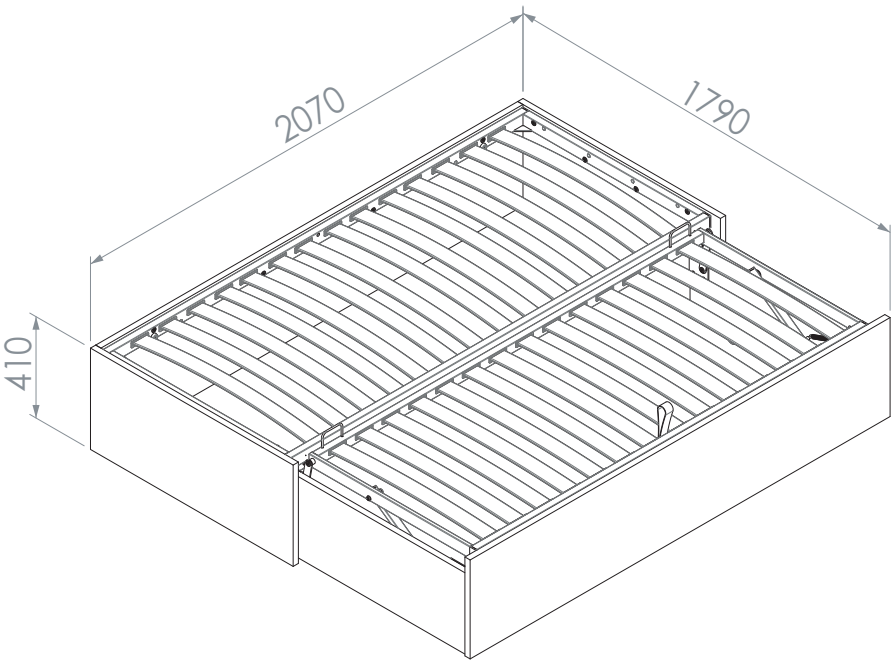



Specifiche materasso per rete estraibile / Specifications mattress for pull-out bed base	
Dimensioni / dimensions	800x1900 mm
Altezza massima / maximum height	200 mm
Peso materrasso / mattress weight	8Kg min 16Kg max


Specifiche materasso per rete superiore
Specifications mattress for upper bed base
900x2000

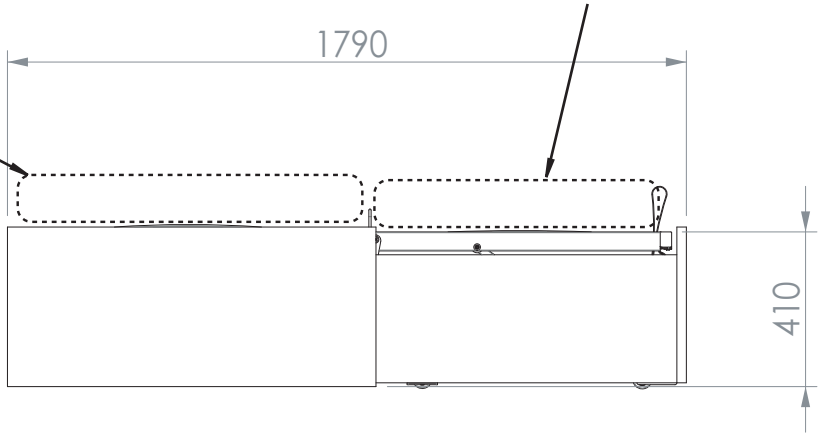

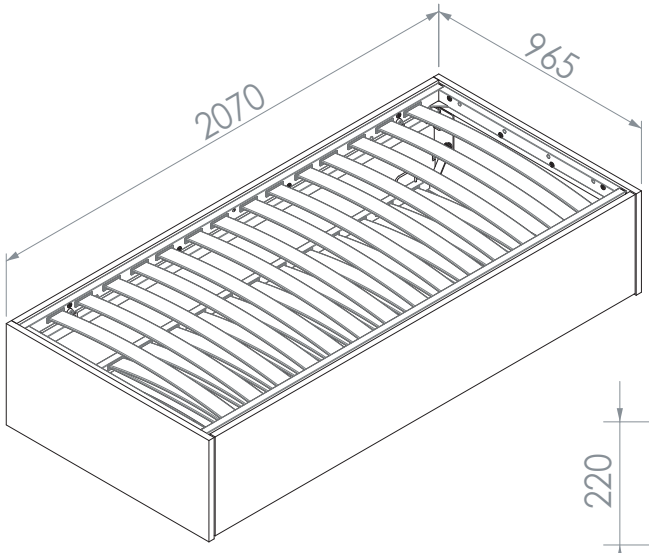

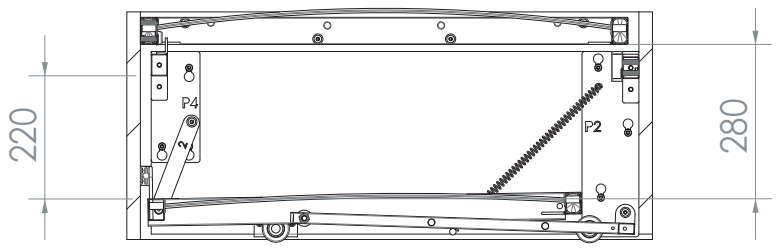

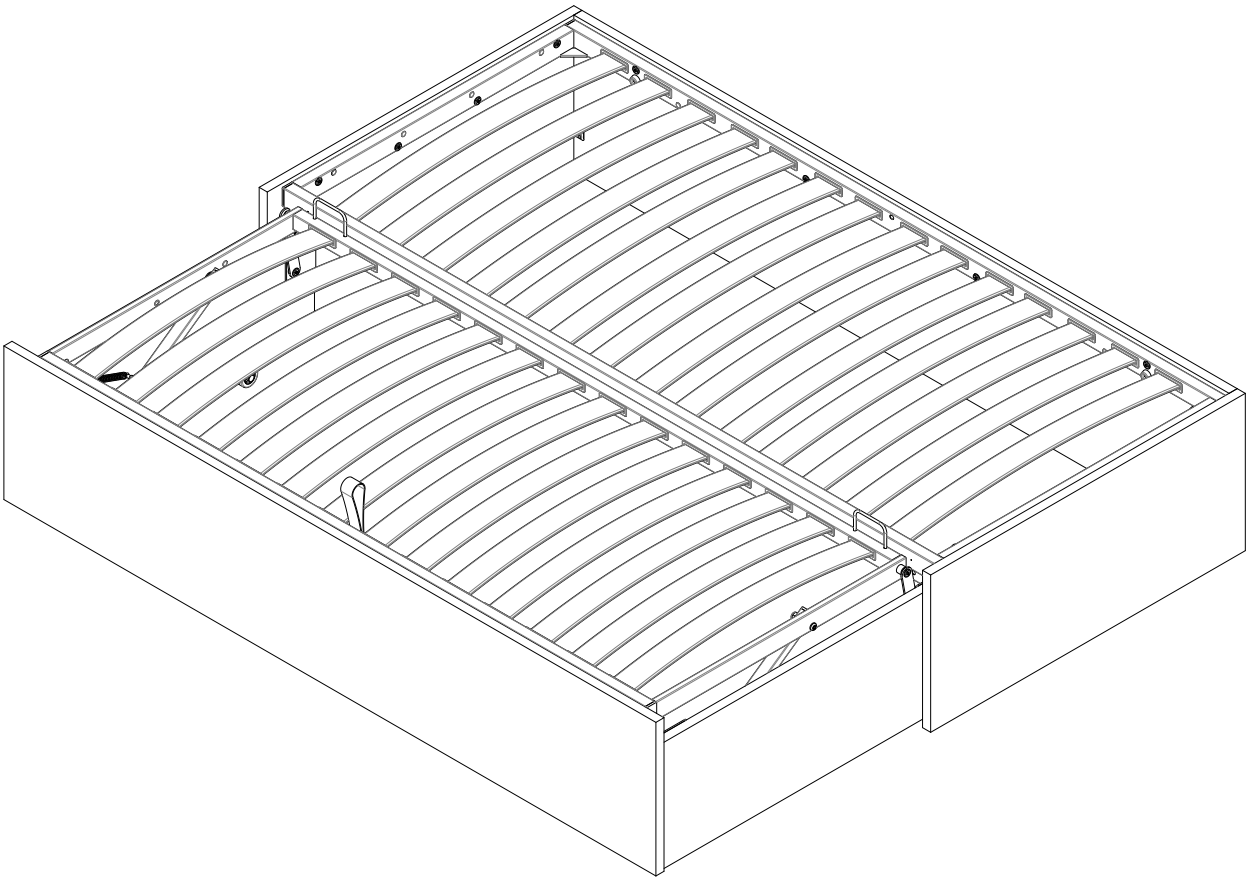

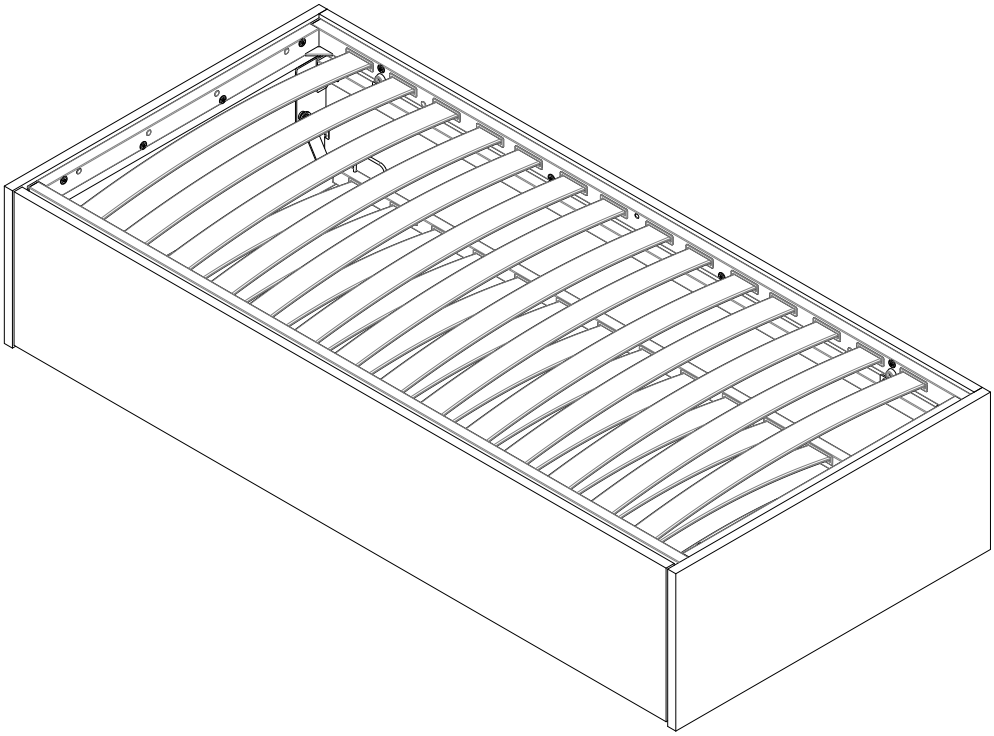

4. Maintenance - cleaning - lubrification - disposal

Maintenance

Make periodical check of all screwed on parts, including also the steadiness of the wall fixation, by checking that no elements are lose, folded, damaged or missing.
Also check that the elements of the bedspring, the handling mechanism, the gas springs, the attachment to the container and the wall are not loose, bent, damaged, or missing. Maintenance must be performed every 60 opening / closing cycles and / or at least once a year.

Cleaning and lubrification

The cleaning of all metal parts shall be made with a humid sponge or cloth.
Don't use any solvents or abrasive materials.
Lubrication of mobile elements as rotation pivots and door hinges, shall be made every 60 cycles with a lubricant.

Disposal

The different parts shall be disposed in special containers in accordance with the ruling standards.
DO NOT DUMP.

