

- ▶ Flap hinge Markant 7.1
- ▶ For overlay flaps



- ▶ Flap hinge for overlay flaps
- ▶ Quality classification under EN 15828, Level 2
- ▶ Door width x height: 600 mm x 450 mm
- ▶ Door weight 3.5 kg
- ▶ Cup diameter 35 mm / cup depth 11.8 mm
- ▶ Mounting plate and flap arm assembly separately
- ▶ Integrated depth adjustment + 2 mm / - 2 mm
- ▶ Height adjustment at mounting plate
- ▶ Can only be used in conjunction with flap stays
- ▶ Nickel plated die-cast zinc / nickel plated steel
- ▶ Mounting plates for SlideOn concealed hinges must be ordered separately


Flap hinge Markant 7.1

Order no.	PU
0 046 849	1/25 pair

Hole line distance LR 37 mm	Order no. / Distance D mm				PU
	0.0	1.5	3.0	5.0	
Cross mounting plate for screwing on	1 079 197	1 079 198	1 079 199	1 079 200	1/400 each

Hole line distance LR 37 mm	Order no. / Distance D mm				PU
	0.0	1.5	3.0	5.0	
Cross mounting plate with premounted Euro screws	1 079 221	1 079 222	1 079 223	1 079 224	1/400 each

Flap / cabinet body drilling pattern

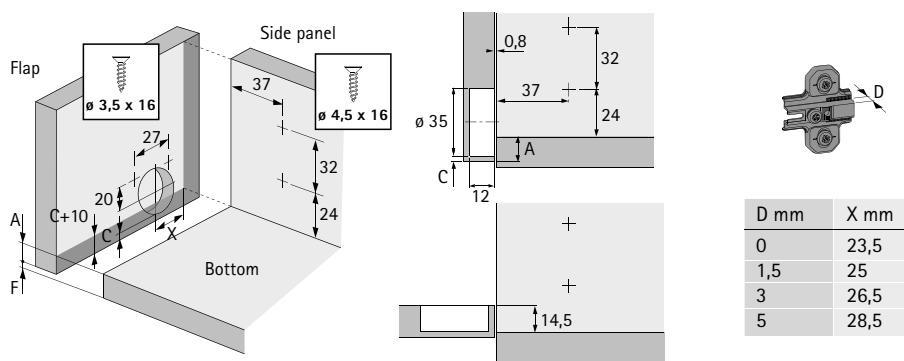

Minimum reveal required below the flap

Cup distance C mm	Overlay A mm	Flap thicknesses mm											
		16	18	20	22	24	26	28	30	32	34	36	38
3	13	0.4	0.8	1.2	1.8	2.4	3.2	4.3	5.9	7.7	9.6	11.5	13.3
4	14	0.4	0.8	1.2	1.8	2.4	3.2	4.2	5.6	7.2	9.1	10.9	12.7
4.5	14.5	0.4	0.8	1.2	1.8	2.4	3.2	4.2	5.6	7.2	9.1	10.9	12.7
5	15	0.4	0.7	1.1	1.6	2.3	3.1	4.0	5.2	6.7	8.5	10.2	12.0
6	16	0.4	0.7	1.1	1.6	2.3	3.0	3.8	4.9	6.2	7.9	9.5	11.3
7	17	0.4	0.6	1.0	1.5	2.1	2.9	3.6	4.6	5.7	7.3	8.8	10.6



hettich.com/short/ec271e